
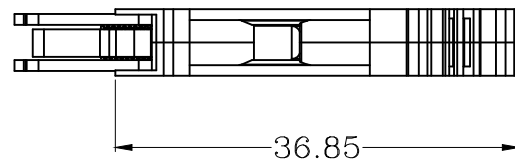
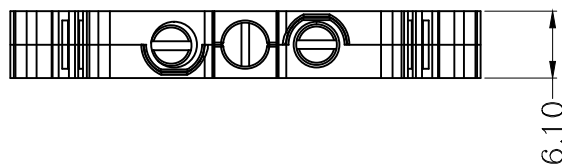
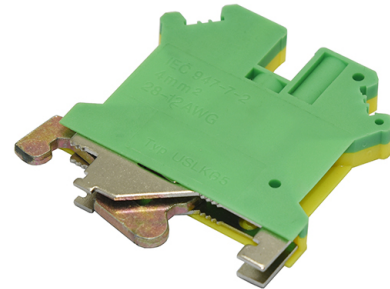


# UK Rail-Mounted Terminal Block

KLS2-USLKG5

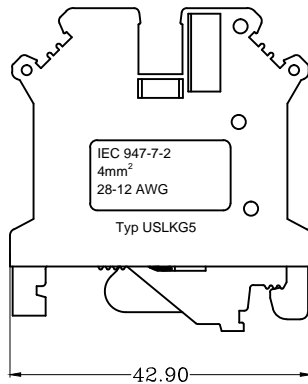

IEC Rated data			
Wire range	0.2-4mm <sup>2</sup>		
Solid	0.2-6mm <sup>2</sup>		
Stranded	0.2-4mm <sup>2</sup>		
Stranded with ferrules without plastic sleeve	0.25-4mm <sup>2</sup>		
Stranded with ferrules with plastic sleeve	0.25-2.5mm <sup>2</sup>		
Strip length	8-9mm		
Rated voltage	800V		
Rated surge voltage	8KV		
Pollution degree	3		
Surge voltage category	III		
UL Rated data	B	C	D
Rated voltage	600V	600V	
Wire range	28-12AWG		
Other information			
Housing	PA66		
Contact	Copper alloy		
Coating	Nickel		
Flame retardant rating	V0		
Storage ambient temperature	-40°C - +85°C		
Usage ambient temperature	-25°C - +70°C		
Screw-thread	M3		
Tightening torque	0.6-0.8 Nm		
rails Size	SP35X7.5/SP35X15/SP32X7.5		