

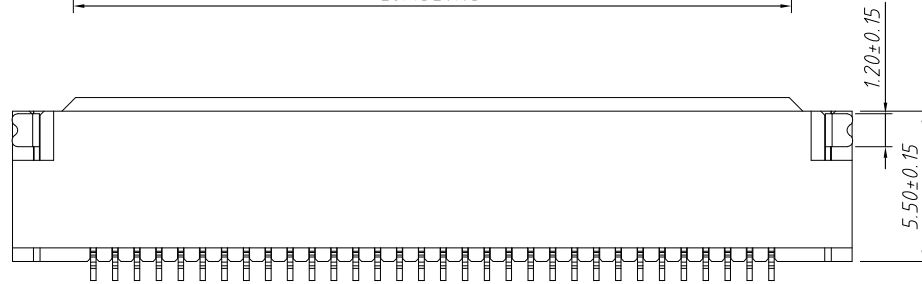
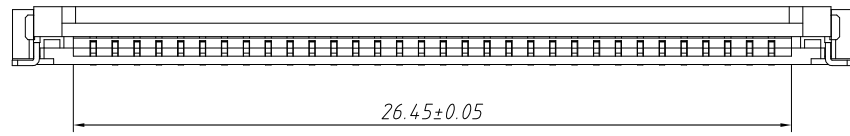


RoHS Compliant



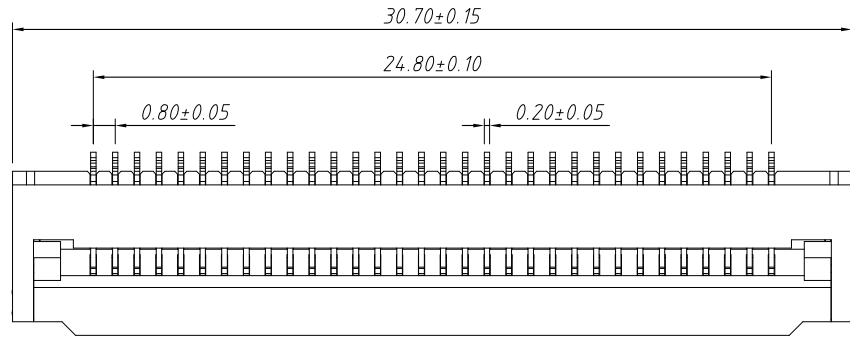


Material
 Housing: LCP UL 94V-0
 Actuator: LCP UL 94V-0
 Contacts: Copper Alloy, Tin Over Nickel
 PEG: Copper Alloy, Tin Over Nickel

Electrical
 Voltage rating: 50 V
 Current Rating: 0.3 A
 Withstanding Voltage: 200 V
 Insulation resistance: 500MΩ.Min.
 Contact resistance: 20 mΩ.Max.
Mechanical
 Temp. Range: -25 °C ~ +85 °C

Order Information

L-KLS1- 241F - 2.0- XX -R

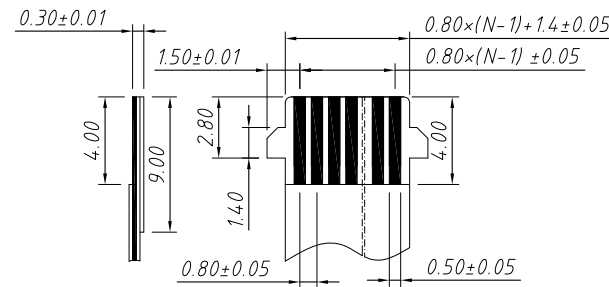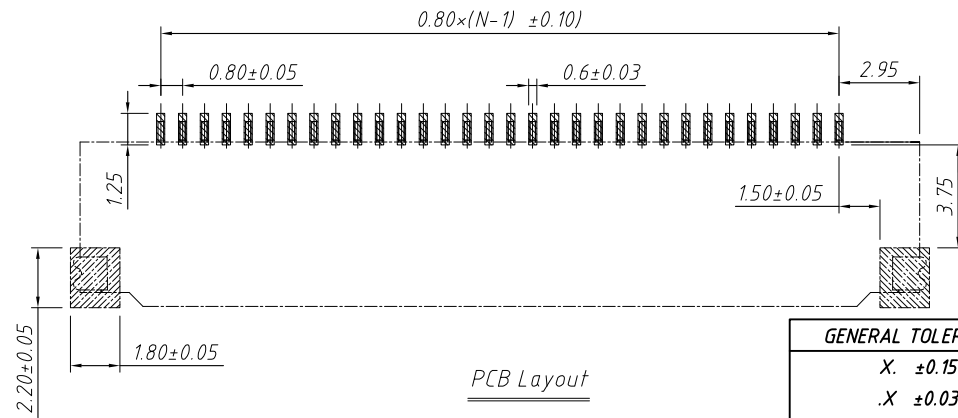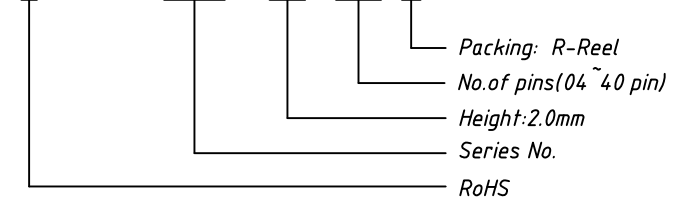

Recommended FPC Dimension

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	Description:
X.	±0.15	X.	±5°	UNITS	CONN FFC 0.80mm, SMD, Horizontal, Lower Contact, with ZIF
.X	±0.03	.X	±3°	SHEET SIZE	
.XX	±0.05	.XX	±2°	KLS P/N:	

Draw by: Date	2018-03-10
Check by: Date	2018-03-10
SCALE	SHEET OF



NingBo KLS ELECTRONIC CO.,LTD.