


Material
Housing: LCP, UL 94 V-0
Terminal: Phosphor bronze, Gold/Tin
Cover: LCP, UL 94 V-0
Solder: Phosphor bronze, Tin

Electrical
Voltage rating: 50 V
Insulation resistance: 500 M Ω .Min.
Contact resistance: 30 m Ω .Max.

Mechanical
Temp. Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Order Information

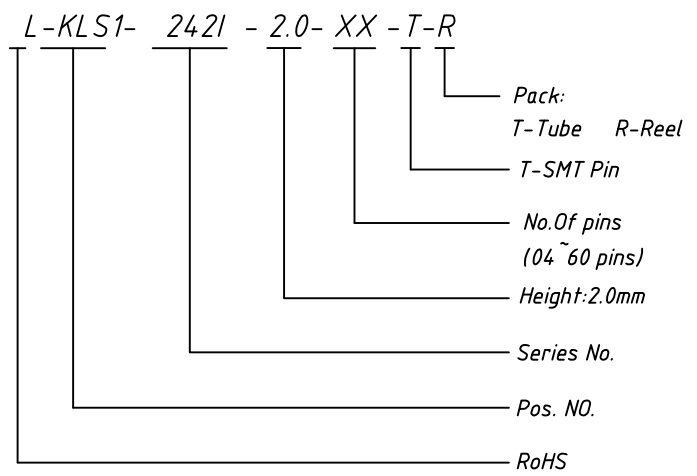

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	Description:
X. ± 0.15	X. $\pm 5^{\circ}$	UNITS	CONN FFC 0.50mm, SMD, Horizontal, with ZIF
.X ± 0.03	.X $\pm 3^{\circ}$	SHEET SIZE	
.XX ± 0.05	.XX $\pm 2^{\circ}$	KLS P/N:	

Draw by: Date 2018-03-10
Check by: Date 2018-03-10
SCALE SHEET OF

KLS
NingBo KLS ELECTRONIC CO., L TD.