


Material
Housing: PBT, UL 94V-0
Cage: Brass, Tin plated
Clamp: Phosphor bronze, Ni plated
Screw: M3.0, steel Zinc plated

Electrical
Rated voltage: 250V
Rated current: 16A
Contact Resistance: 20 m Ω
Insulation resistance: 500M Ω /DC500V
Withstand voltage: AC2000V / 1 min
Wire Range: 22~14AWG 2.5mm²

Mechanical
Temp. Range: -40 °C ~ +105 °C
Strip length: 4.5~5mm
Torque: 0.5Nm (4.5Lb.in)

Order Information

L-KLS2-305V-7.50-XXP-2S00

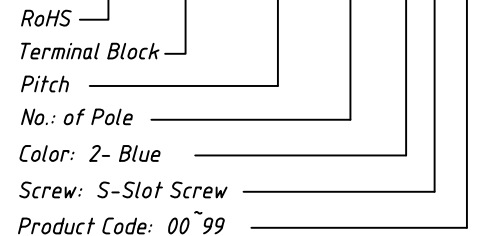

GENERAL TOLERANCE		ANGLE TOLERANCE		Description:	
X. ±0.60		X. ±5°		Screw Conn Term Block 7.50MM	
.X ±0.38		.X ±3°		KLS P/N:	KLS2-305V-7.50-XXP-2S
.XX ±0.25		.XX ±2°			
Draw by	2015-09-01	PROJECTION		NingBo KLS ELECTRONIC CO.,L TD.	
Check by	2015-09-15	UNITS	mm		
SCALE		SHEET SIZE	A4		