


RoHS compliant

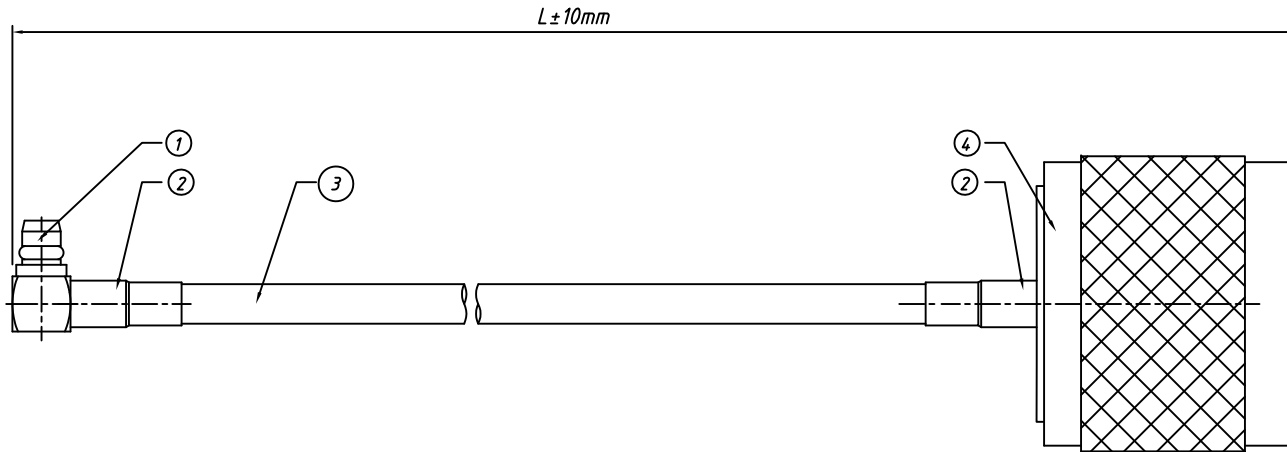


Note:

- 1: V.S.W.R: 1.5(0~3G), Max.
- 2: Wire surface shall have no dirt, broken.
- 3: Connector surface with coating, oxidation phenomenon.
- 4: Connector pins and insulator are in the same plane

Order Information

L- KLS1- RFCA23 -LMR100 - L300

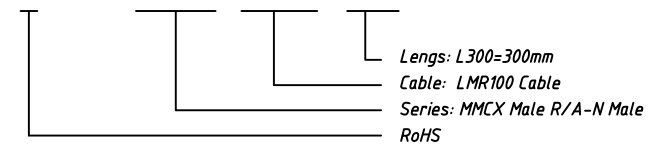

4	Connector	N-J Male Plug, for LMR100	PCS	1
3	RF Cable	LMR100 Cable, Black,OD2.8mm	mm	L
2	Heat-Shrink Tube	φ2.5mm Heat-Shrink Tube,Block,L15mm	PCS	2
1	Connetor	MMCX Male Plug, Right angle,for LMR100	PCS	1
No.	Name	Description	UNITS	Q'ty

		Description:	
		MMCX Male R/A to N Male Cable	
PROJECTION		KLS P/N:	L-KLS1-RFCA23-xxxx
UNITS	mm		
SHEET SIZE	A4		
Draw:	Daniel	2018-06-21	NingBo KLS ELECTRONIC CO.,L TD.
Check:	Daniel	2018-06-21	