



Material
 Housing: PBT,UL 94V-0
 Shell :SPCC,Cu: 80U"Min,Ni:80U"Min
 Terminal :4P Phosphor Bronze ;5P Brass
 Ni:50U"Min / Sn:100U"Min

Electrical
 Voltage Current Rating:2AMP,30V AC
 Insulator Resistance: 100MΩ Min
 Contact Resistance: 50mΩ Max
 Withstanding Voltage: 300V AC

Mechanical
 Operating Temperature:-55°C TO +85°C.
 Mating Force: 35N MAX
 Unmating Force: 10N MIN.

Order Information

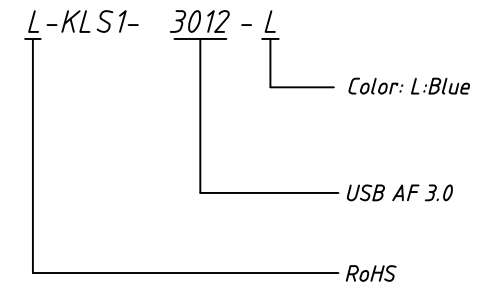

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:	
.X	±0.60	.X	±5°	UNITS	mm	USB 3.0 Type A Female CONN,Solder	
.X	±0.38	.X	±3°	SHEET SIZE	A4		
.XX	±0.25	.XX	±2°	KLS P/N:			
Draw by: Date		2018-03-01		 NingBo KLS ELECTRONIC CO.,L TD.			
Check by:: Date		2018-03-01					
SCALE		SHEET		OF			