


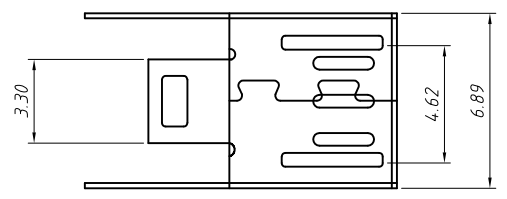
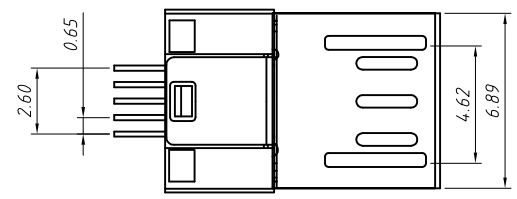
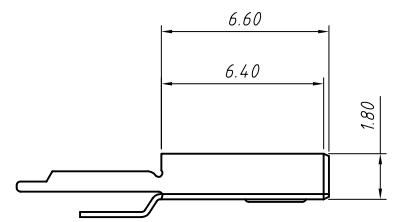
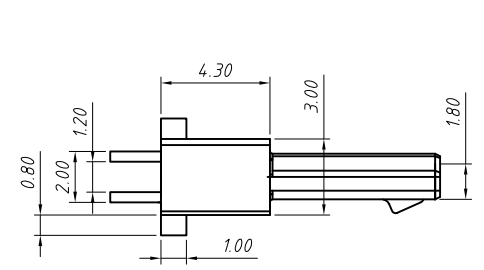



**Material**  
 Housing:Hing Temperature Thermoplastic with g.f,UL 94 V-0.  
 Contact:Copper Alloy,t=0.20mm.  
 Shell:SUS,t=0.20mm.

**Electrical:**  
 Current Rating:1A Max.  
 Dielectric Withstanding Voltage:  
 100 V AC for 1 min.  
 Contact Resistance:50mΩ Max.  
 Insulation Resistance:100MΩ Min.  
 Total Mating Force:3.57 kgf Max.  
 Total Unmating Force:1.0 kgf Min.  
 Temperature Range:  
 -30°C Up To +80°C



GENERAL TOLERANCE	PROJECTION		Description:
.X ±0.50	UNITS	mm	CONN PLUG MICRO USB TYPE B CLIP L6.8
.X ±0.25	SCALE	1:1	
.XX ±0.10	Draw by:	Jenny	KLS P/N: L-KLS1-236-5M6-B
ANGLE TOLERANCE	Check by:		NingBo KLS ELECTRONIC CO.,L TD.
.X ±5°	Date	2018-03-01	
.X ±3°	SHEET	1 OF 1	
.XX ±2°			