


SECTION A-A


OPEN

LOCK

0.10 Max

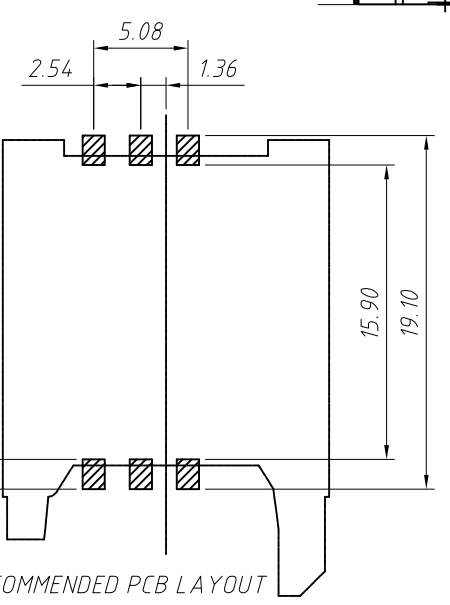


RECOMMENDED PCB LAYOUT



SIM CARD

- NOTES:
- 1.0 RATING.
  - 1.1 VOLTAGE: 12 VAC (rms)
  - 1.2 CURRENT: 1 AMPERES MAX. PER CONTACT
  - 1.3 OPERATION TEMPERATURE RANGE: -25°C ~ +70°C
  - 2.0 ELECTRIC CHARACTERISTICS:
  - 2.1 CONTACT RESISTANCE: 60mΩ
  - 2.2 INSULATION RESISTANCE: 1000MΩ
  - 2.3 DIELECTRIC WITHSTANDING  
VOLTAGE: 500V AC FOR 1 MINUTE
  - 3.0 OPERATION LIFE: 5000 CYCLES

Pin No.	Pin Name
C1	Supply Voltage VCC
C2	Reset (RST)
C3	Clock (CLK)
C4	N/A
C5	Ground
C6	Programming Voltage VPP
C7	I / O
C8	N/A

GENERAL TOLERANCE	PROJECTION	Symbol	Description:
X. ±0.50	UNITS	mm	SIM 6P Hinge Type 1.8H Gold Flash
.X ±0.25	SCALE	1:1	
.XX ±0.10	Draw by:	Jenny	
ANGLE TOLERANCE	Check by:		KLS P/N: L-KLS1-SIM-018A-6P-H1.8-R
X. ±5°	Date	2018-03-01	 NingBo KLS ELECTRONIC CO.,L TD.
.X ±3°	SHEET	1 OF 1	
.XX ±2°			