
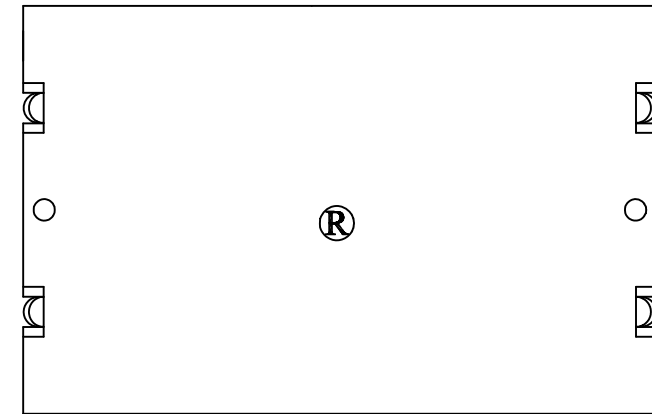
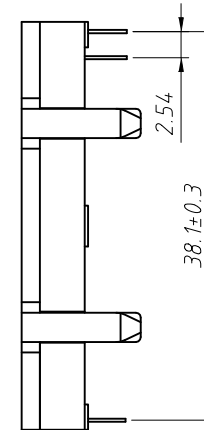
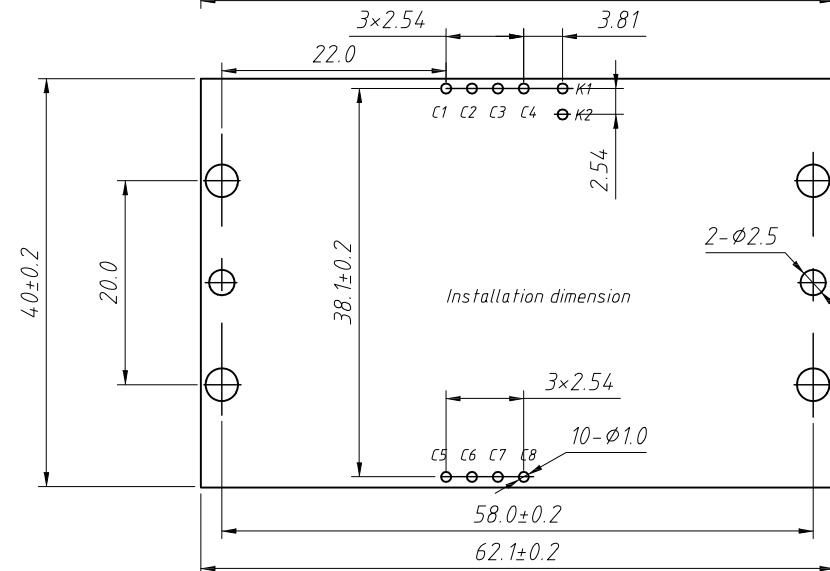
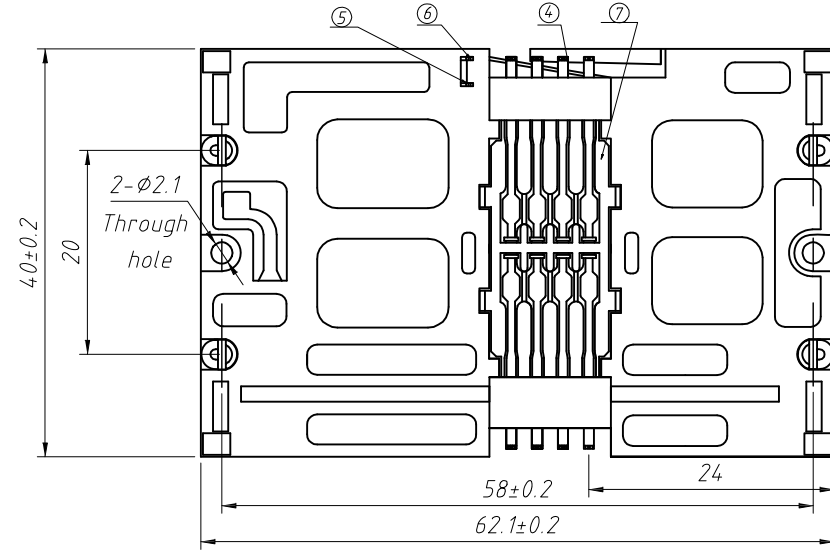


RoHS Compliance

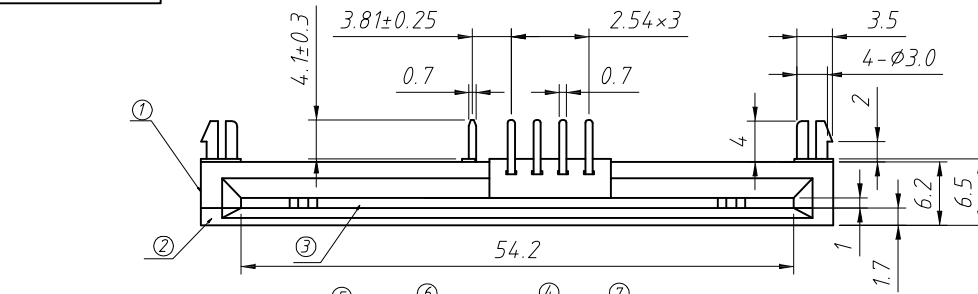

**Material:**

- 1. Bracket: PC, black
- 2. Cover plate: bracket: PC, black
- 3. Small door: bracket: PC, black
- 4. Reed: phosphor copper, bottom Ni, surface local Au
- 5. Large switch: phosphor copper
- 6. Small switch: phosphor copper
- 7. Button: PC, black
- 8. Small door spring: stainless steel

**Technical requirements:**

- 1. The appearance of the product is free of dirt, scratches and deformation
- 2. The plastic body has no burr, not full, and the reed has no oxidation and rust

**Remarks:**

- 1. According to the switch, the product is divided into two types: 1 normally open type and 2 normally closed type
- 2. The plating specification of reed is gold plating on nickel base, and the thickness of gold plating layer can be changed according to the customer's requirements.

ANGLE TOLERANCE	PROJECTION	Description:	Smart Card Connector PUSH PULL, 8P+2P, With post
±3°			
GENERAL TOLERANCE	UNITS	mm	KLS P/N: L-KLS1-ISC-F002
x.x ±0.30	SHEET SIZE	A4	
x.xx ±0.20	Draw:	Daniel	2018-07-10
x.xxx ±0.10	Check:	Daniel	2018-07-10

