



SECTION A-A

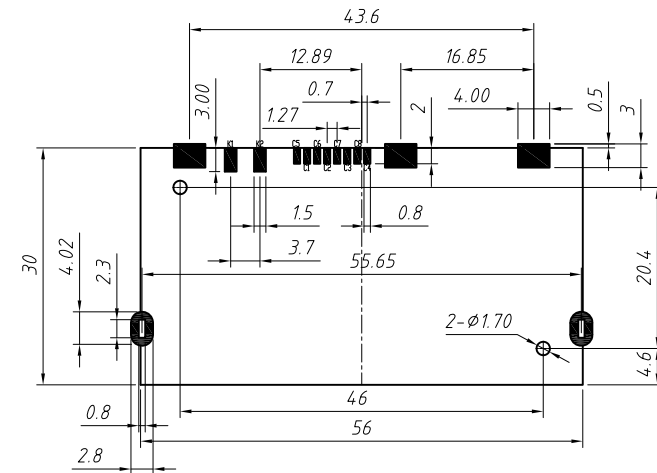

PCB LAYOUT
TOLERANCE:±0.05

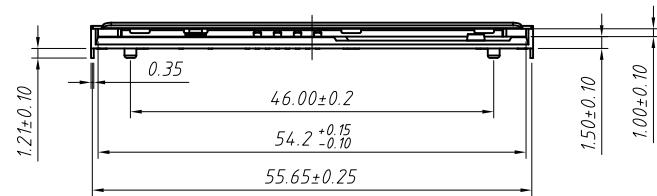

Solderability

Vapor phase:215°C.30sec.Max.

IR feflow:260°C.10sec.Max.

Manual soldering:370°C.3sec.Max.

Environmental Characteristics

Operating Temperature:-40°C TO +85°C

Operating humidity:10%-+95%RH.

Electrical Characteristics

Durability:500000 cycles min.

Contact Resistance:50Ω typical,100Ω Max.

Insulation Resistance:>1000MΩ/500V DC.

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:
X	±0.15	X	±5°	UNITS	mm	Smart Card Connector PUSH PULL,8P+2P L-KLS1-ISC-F011EC
X	±0.03	X	±3°	SHEET SIZE	A4	
XX	±0.05	XX	±2°		KLS P/N:	
Draw by:	Jenny	Date:	2018-11-01	NingBo KLS ELECTRONIC CO.,L TD.		
Check by:		Date:				
SCALE		SHEET	1 OF 1			