


Material
 Body: Brass
 Insulating material: Teflon
 Center Contact: Plating Gold

Electrical:
 Impedance: 50Ω
 Durability: 500 Cycles Min.
 Voltage Rating : 500V
 Operating Temperature: -65°C ~ 165°C

Order Information

L - KLS1 - SMA036

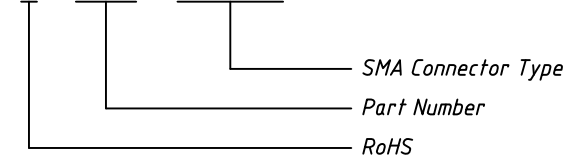

| | | | |
|-------------------|------------|------------|--|
| GENERAL TOLERANCE | PROJECTION | | Surface Mount SMA Connector (Jack, Female, 50Ω) |
| .X ±0.50 | UNITS | mm | |
| .X ±0.25 | SCALE | 1:1 | |
| .XX ±0.10 | Draw by: | Jenny | KLS P/N: L-KLS1-SMA036 |
| ANGLE TOLERANCE | Check by: | | NingBo KLS ELECTRONIC CO.,L TD. |
| .X ±5° | Date | 2018-03-01 | |
| .X ±3° | SHEET | 1 OF 1 | |
| .XX ±2° | | | |