
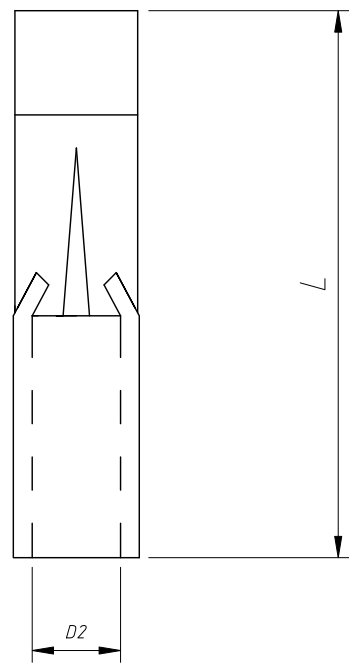



1
RoHS Compliance

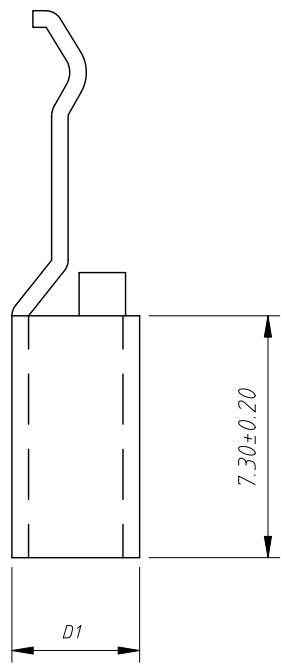

Material:
Terminal: Red Copper, Silver Plated

Electrical Characteristics:
Rated Current: 15A
Rated Voltage: 600V

Applicable Housing :
L-KLS1-XD45-H






Part Number	D1 (mm)	D2 (mm)	L (mm)	Wire
L-KLS1-XD45-T1	2.85 ± 0.20	1.78 ± 0.20	16.50 ± 0.20	16/20AWG

Order Information:
L-KLS1-XD45-T1
L: RoHS
XD Series
Type: Terminal

ANGLE TOLERANCE		PROJECTION		Description:	
$\pm 3^\circ$				PP15 Tin Plated Power Contacts	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	
x.x	± 0.30	SHEET SIZE	A4	L-KLS1-XD45-T1	
x.xx	± 0.20	Draw:	Daniel	2022-04-02	
x.xxx	± 0.10	Check:	Daniel	2022-04-02	

NingBo KLS ELECTRONIC CO.,L TD.

1
RoHS Compliance

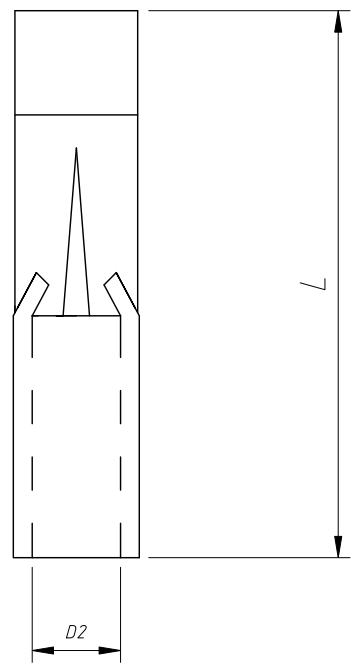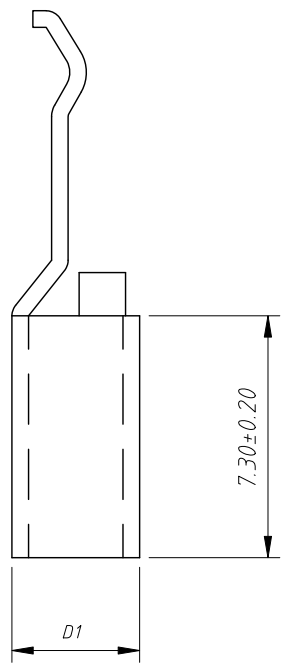


Part Number	D1 (mm)	D2 (mm)	L (mm)	Wire
L-KLS1-XD45-T	3.8 ± 0.20	2.54 ± 0.20	16.50 ± 0.20	12/16AWG

Material:
Terminal: Red Copper, Silver Plated

Electrical Characteristics:
Rated Current: 30A
Rated Voltage: 600V




Applicable Housing :
L-KLS1-XD45-H

Order Information:



ANGLE TOLERANCE	PROJECTION	Description:	PP30 Tin Plated Power Contacts	
$\pm 3^\circ$				
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS1-XD45-T
x.x ± 0.30	SHEET SIZE	A4		
x.xx ± 0.20	Draw:	Daniel	2022-04-02	NingBo KLS ELECTRONIC CO.,L TD.
x.xxx ± 0.10	Check:	Daniel	2022-04-02	

1
RoHS Compliance

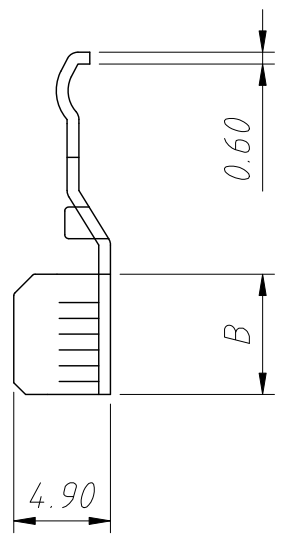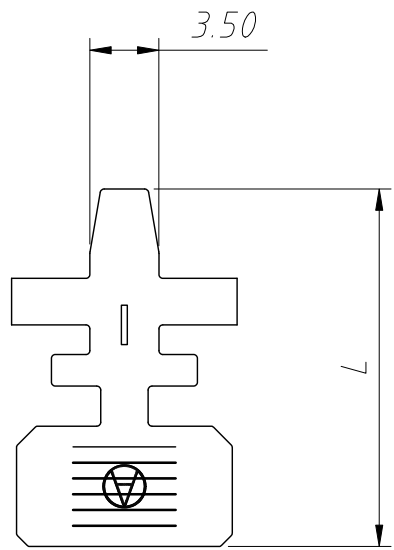

Material:
Terminal: Red Copper, Silver Plated

Electrical Characteristics:
Rated Current: 45A
Rated Voltage: 600V

Applicable Housing :
L-KLS1-XD45-H


Order Information:
L-KLS1-XD45-T1A
L: RoHS
XD Series
Type:
T1A Terminal

Part Number	L (mm)	B (mm)	C (mm)	Wire
L-KLS1-XD45-T1A	17.5±0.20	6.10±0.20	3.12±0.20	10/12AWG

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				PP45 Tin Plated Power Contacts	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	
x.x	±0.30	SHEET SIZE	A4	L-KLS1-XD45-T1A	
x.xx	±0.20	Draw:	Daniel	2022-04-02	
x.xxx	±0.10	Check:	Daniel	2022-04-02	

NingBo KLS ELECTRONIC CO.,L TD.

1
RoHS Compliance

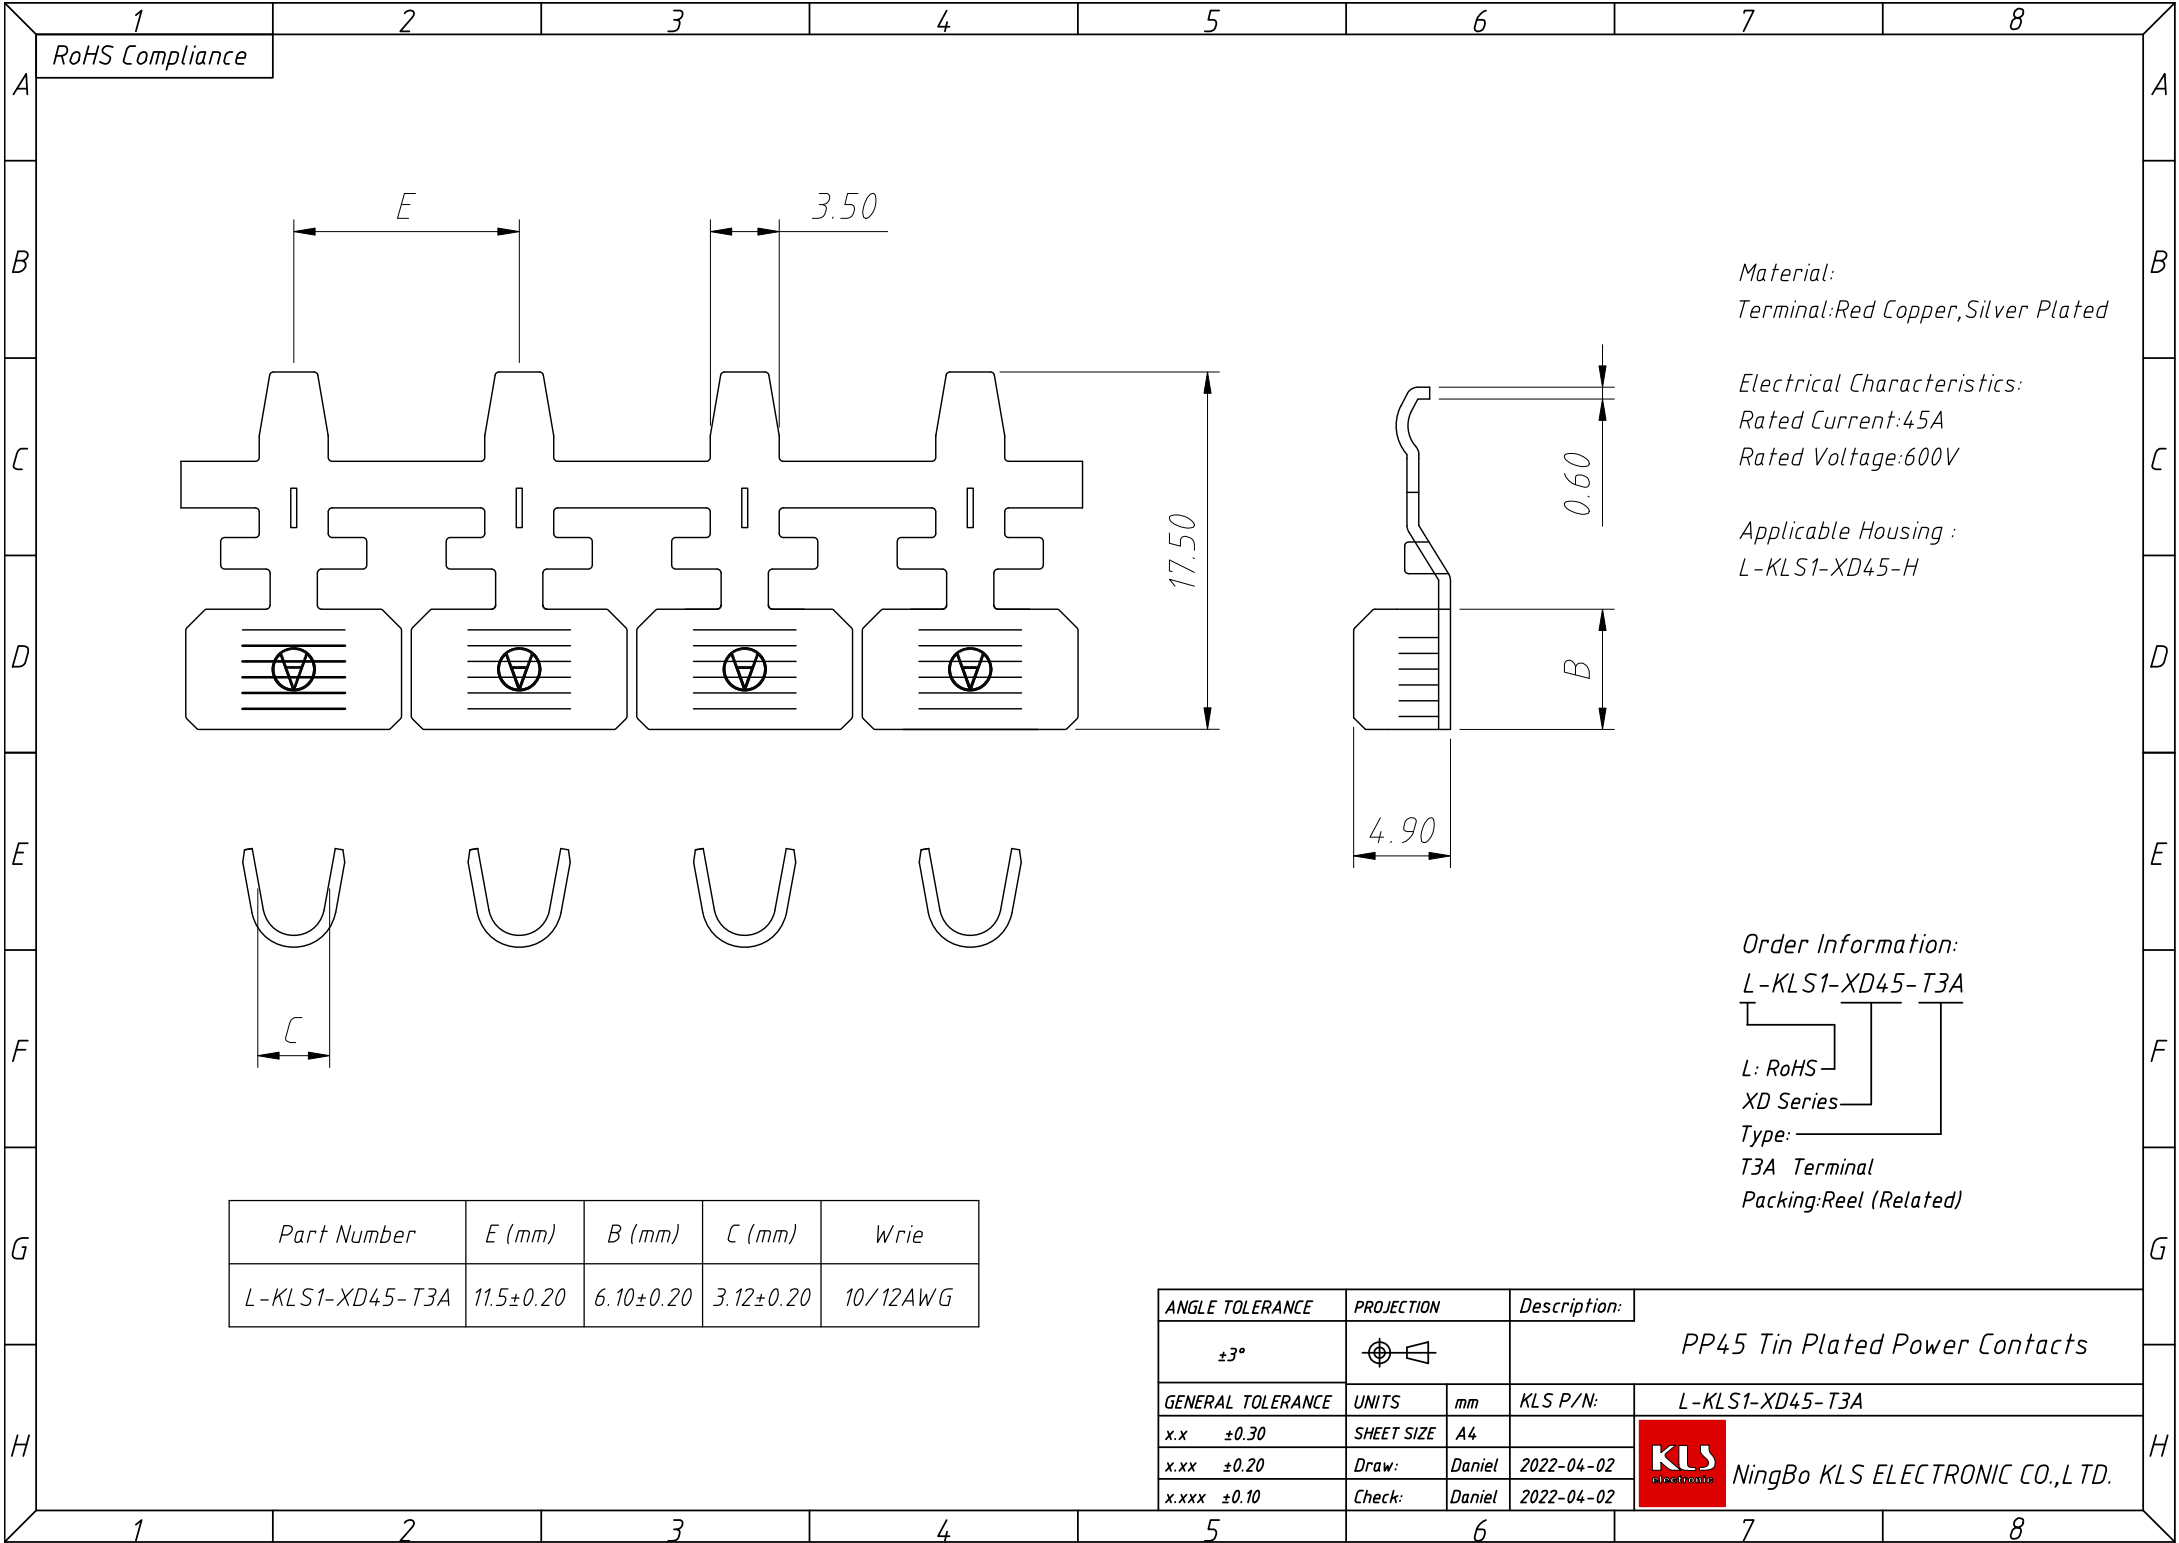

Material:
Terminal:Red Copper,Silver Plated

Electrical Characteristics:
Rated Current:45A
Rated Voltage:600V

Applicable Housing :
L-KLS1-XD45-H

Order Information:
L-KLS1-XD45-T3A

```

graph TD
    L --- L1[L: RoHS]
    L --- L2[XD Series]
    L --- L3[Type: ]
    L --- L4[T3A Terminal]
    L --- L5[Packing:Reel (Related)]
  
```

Part Number	E (mm)	B (mm)	C (mm)	Wire
L-KLS1-XD45-T3A	11.5±0.20	6.10±0.20	3.12±0.20	10/12AWG

ANGLE TOLERANCE	PROJECTION	Description:		
±3°		PP45 Tin Plated Power Contacts		
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS1-XD45-T3A
x.x ±0.30	SHEET SIZE	A4		
x.xx ±0.20	Draw:	Daniel	2022-04-02	
x.xxx ±0.10	Check:	Daniel	2022-04-02	

NingBo KLS ELECTRONIC CO.,L.TD.