


Part Number	Current Rating	Housing Color
L-KLS5-228N-020-A	20A	White
L-KLS5-228N-030-A	30A	Pink
L-KLS5-228N-040-A	40A	Green
L-KLS5-228N-050-A	50A	Red
L-KLS5-228N-060-A	60A	Yellow
L-KLS5-228N-070-A	70A	Brown
L-KLS5-228N-080-A	80A	Black
L-KLS5-228N-100-A	100A	Blue

Characteristics:
Voltage Rating: 32V DC
Current Rating: 20A ~ 100A
Operating Temperature: -40°C to +125°C

Material:
Body: PC / Plastic
Contact: Copper Alloy

Time-Current Characteristics

% of Rating	Opening Time
110	14400s
200	5s to 100s
350	0.2s to 7s
600	0.04s to 1s

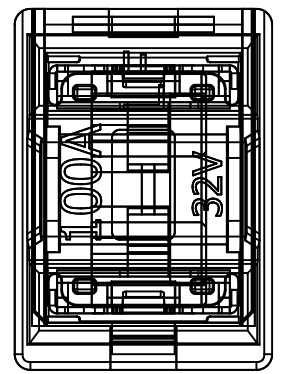

GENERAL TOLERANCE	PROJECTION		Description:
X. ± 0.5	UNITS	mm	32V Auto Link PAL Fuse
.X ± 0.25	SCALE	2:1	
.XX ± 0.15	Draw by:	Daniel	KLS P/N: L-KLS5-228N-XXX-A
ANGLE TOLERANCE	Check by:	Daniel	NingBo KLS ELECTRONIC CO.,L TD.
X. $\pm 5^\circ$	Date	2022-09-01	
.X $\pm 3^\circ$	SHEET	1 OF 1	
.XX $\pm 2^\circ$			