


Recommend Mounting Hole

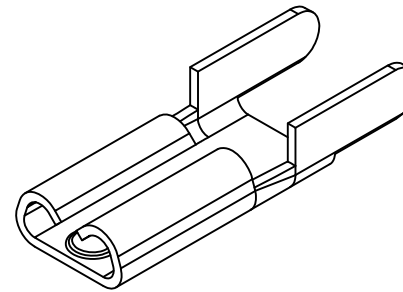

Characteristics:  
 Voltage Rating: 250V  
 Current Rating: 15A  
 Insulation Resistance: 100MΩ Min. at 500VDC  
 Dielectric Strength: AC 500 V Min. at 60s

Material: Brass, T=0.3mm, Tin Plated  
 Fuse type: Miniature Blade Fuse  
 KLS5-269-xxx

Order Information:

L - KLS5 - 719 -3 T  
 L: RoHS  
 Thickness: 3- T=0.3mm  
 Plated: T-Tin plated

GENERAL TOLERANCE	PROJECTION		Description:
.X ±1.00	UNITS	mm	32V Miniature Blade Fuse Clip, 2.8x0.6mm KLS P/N: L-KLS5-719-3T
.X ±0.50	SCALE	4:1	
.XX ±0.30	Draw by:	Daniel	
ANGLE TOLERANCE	Check by:	Daniel	NingBo KLS ELECTRONIC CO.,LTD.
±5°	Date	2022-09-01	
	SHEET	1 OF 1	