
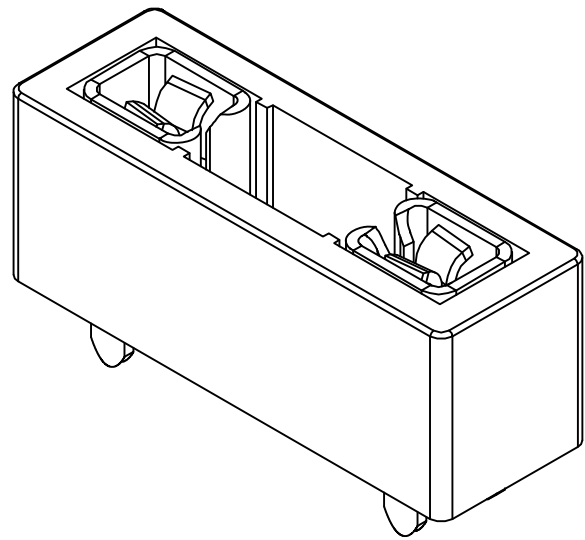


Recommend Mounting Hole

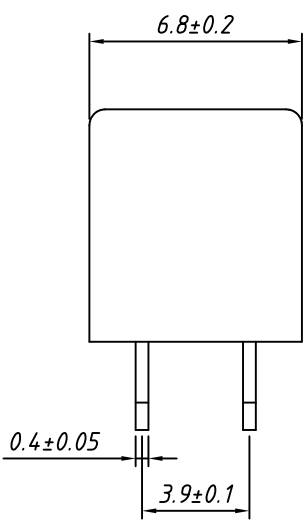

Characteristics:  
Voltage Rating: 250V  
Current Rating: 40A Max.  
Insulation Resistance: 100MΩ Min. at 500VDC  
Dielectric Strength : AC 500 V Min.at 60s

Material:  
Contact: Brass, T=0.4mm, Tin Plated  
Insulator: High Temp Nylon+GF, UL 94-V0  
Fuse type:  
Medium Blade Fuse: KLS5-270-xxx  
Miniature Blade Fuse: KLS5-269-xxx  
Low Profile Miniature Blade Fuse: KLS5-269B-xxx

GENERAL TOLERANCE	PROJECTION		Description:
X. ±1.00	UNITS	mm	32V Medium Blade Fuse Clip
.X ±0.50	SCALE	4:1	
.XX ±0.30	Draw by:	Daniel	KLS P/N: L-KLS5-715-05
ANGLE TOLERANCE	Check by:	Daniel	NingBo KLS ELECTRONIC CO.,L TD.
±5°	Date	2022-09-01	
	SHEET	1 OF 1	