

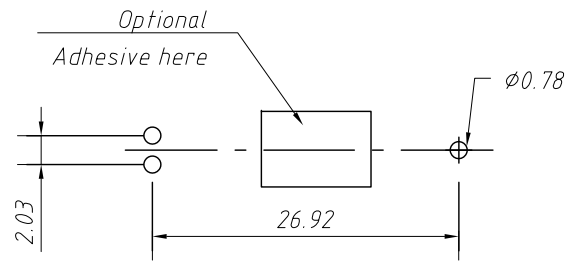
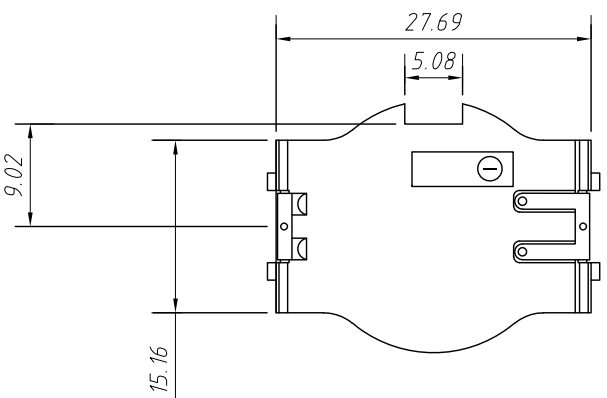


1
RoHS Compliance



PCB LAYOUT

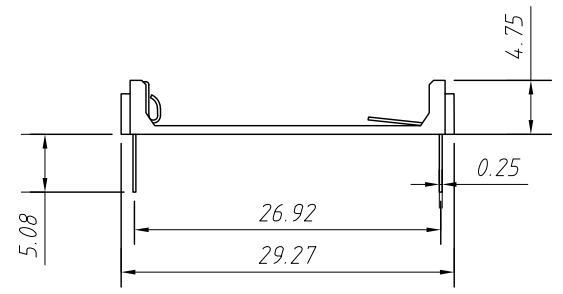

Square Contact Detail

SPECIFICATIONS:

Holder material- LCP Zenite, Color Off white.
 Contacts : Phosphor Bronze C5191, Gold Flash, 1u - 3u thickness
 Temperature range: -40°C to +280°C
 Vibration Test: 10-50-10 Hz swept in 60 seconds
 X,Y,Z direction: 1 hour each direction
 Result: No dislodgement of the cell or damage
 No discontinuity over 10 micro-seconds
 Shock Test: Half sine wave acceleration 150G. 6 m/s
 3 shock pulses each direction per axis, total of 18 pulses
 Result: No evidence of physical damage
 Drop Test: 1meter - No dislodgement of cell
 ROHS Compliant

Order Information:

L-KLS5-CR2032-60B
 L: RoHS
 CR2032 Coin
 Battery Holder
 Part Number

ANGLE TOLERANCE			Description:	CR2032 DIP COIN CELL RETAINERS, H4.75mm,Au plated
±3°				
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS5-CR2032-60B
x.x ±0.30	SHEET SIZE	A4		
x.xx ±0.20	Draw:	Daniel	2022-03-01	NingBo KLS ELECTRONIC CO.,L TD.
x.xxx ±0.10	Check:	Daniel	2022-03-01	