

Tactile Switches

KLS7-TS0304 Tactile switch SMD


Characteristics:

Rating: DC12V 50mA
 Travel: 0.20±0.1mm
 Operating Force: 160 ~ 260±50gf
 Contact Resistance: 100mΩ Max.
 Life: 50000 ~ 100000 Cycles Min.
 Operating temperature range: -20°C ~ 70°C



VII

Dimensions

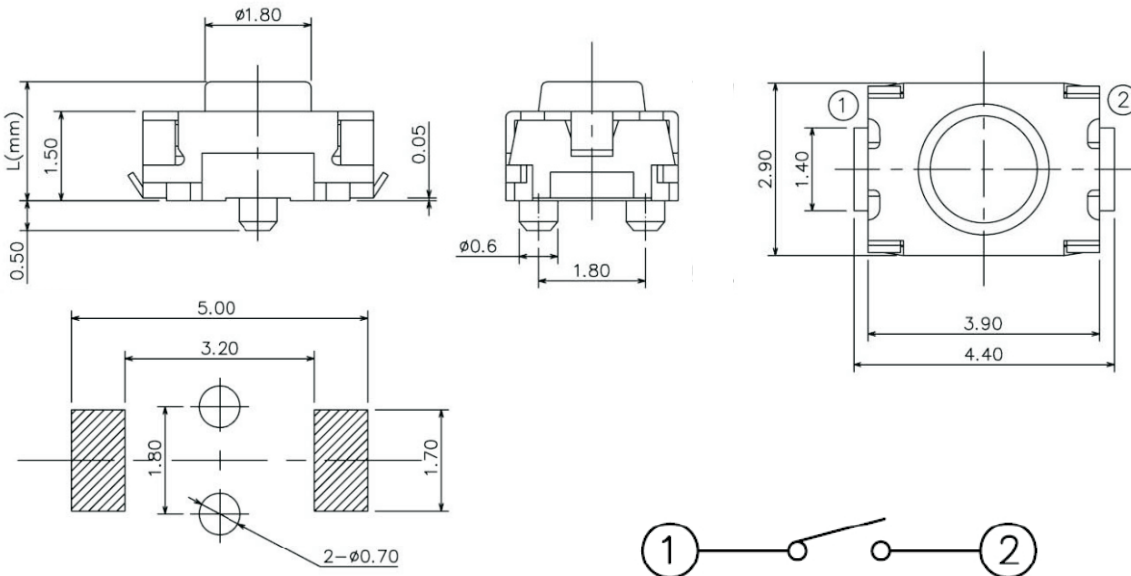

Mounting Holes

Contact Configuration

产品编号	高度 (L)	动作力	定位柱	操作方向	行程	操作寿命 (5mA 12V DC)	初期接触电阻
TS0304-2.0-160-T-2.0H	L=2.0	1.57N	有	Top push	0.20m	100,000 cycles	100mΩ max.
TS0304-2.0-260-T-2.0H	L=2.0	2.55N	有	Top push	0.20m	50,000 cycles	100mΩ max.
TS0304-2.5-160-T-2.5H	L=2.5	1.57N	有	Top push	0.20m	100,000 cycles	100mΩ max.
TS0304-2.5-260-T-2.5H	L=2.5	2.55N	有	Top push	0.20m	50,000 cycles	100mΩ max.

ORDER INFORMATION

Product NO.: KLS7-TS0304-2.0-160-T

Part Number _____ T-SMD Tactile Switch
 Shank Size _____ Operating Force : 160~260gf

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information