

Plastic cylindrical shape photoelectric sensors **PR18S** series


## Features

- ◆ Retro reflection working principle;
- ◆ Excellent anti-interference performance
- ◆ High detection accuracy



## Part number


AC 2 wires NO PR18S-DM3ATO-E2

AC 2 wires NC PR18S-DM3ATC-E2



## Technical specifications

Detection type	Retro reflection	Consumption current	≤3mA
Rated distance [Sn]	3m (non-adjustable)	Circuit protection	.....
Standard target	TD-09 reflector	Response time	< 50ms
Light source	Infrared LED (880nm)	Output indicator	Yellow LED
Dimensions	M18*84.5mm	Ambient temperature	-15°C...+55°C
Output	NO/NC (depends on part No.)	Ambient humidity	35-85%RH (non-condensing)
Supply voltage	20...250 VAC	Voltage withstand	2000V/AC 50/60Hz 60s
Target	Opaque object	Insulation resistance	≥50MΩ(500VDC)
Hysteresis range [%/Sr]	.....	Vibration resistance	10...50Hz (0.5mm)
Repeat accuracy [R]	≤5%	Degree of protection	IP67
Load current	≤300mA	Housing material	PBT
Residual voltage	≤10V	Connection type	M12 Connector

## Dimensions

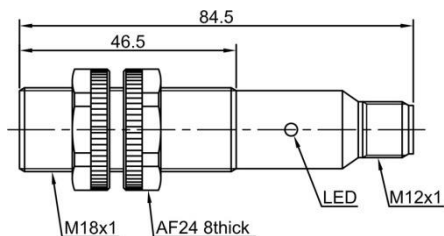

## Wiring diagram



Plastic cylindrical shape photoelectric sensors **PR18S** series


## Features

- ◆ Retro reflection working principle;
- ◆ Excellent anti-interference performance
- ◆ High detection accuracy




## Part number

AC 2 wires NO	PR18S-DM3ATO	AC 2 wires NC	PR18S-DM3ATC
---------------	--------------	---------------	--------------

## Technical specifications

Detection type	Retro reflection	Consumption current	≤3mA
Rated distance [Sn]	3m (non-adjustable)	Circuit protection	.....
Standard target	TD-09 reflector	Response time	< 50ms
Light source	Infrared LED (880nm)	Output indicator	Yellow LED
Dimensions	M18*70mm	Ambient temperature	-15°C...+55°C
Output	NO/NC (depends on part No.)	Ambient humidity	35-85%RH (non-condensing)
Supply voltage	20...250 VAC	Voltage withstand	2000V/AC 50/60Hz 60s
Target	Opaque object	Insulation resistance	≥50MΩ(500VDC)
Hysteresis range [%/Sr]	.....	Vibration resistance	10...50Hz (0.5mm)
Repeat accuracy [R]	≤5%	Degree of protection	IP67
Load current	≤300mA	Housing material	PBT
Residual voltage	≤10V	Connection type	2m PVC cable

## Dimensions

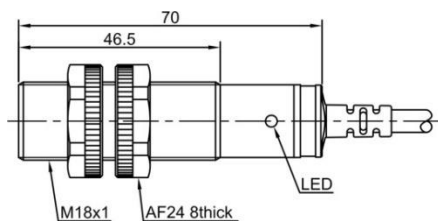

## Wiring diagram

