

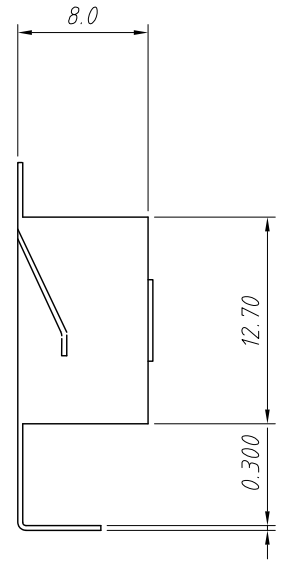
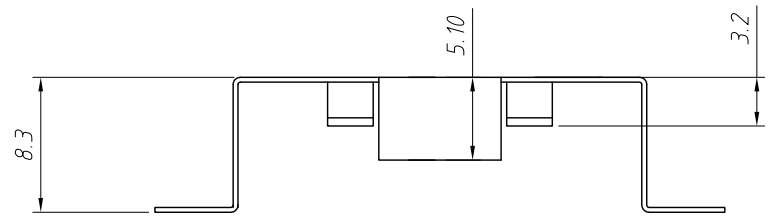


1
RoHS Compliance

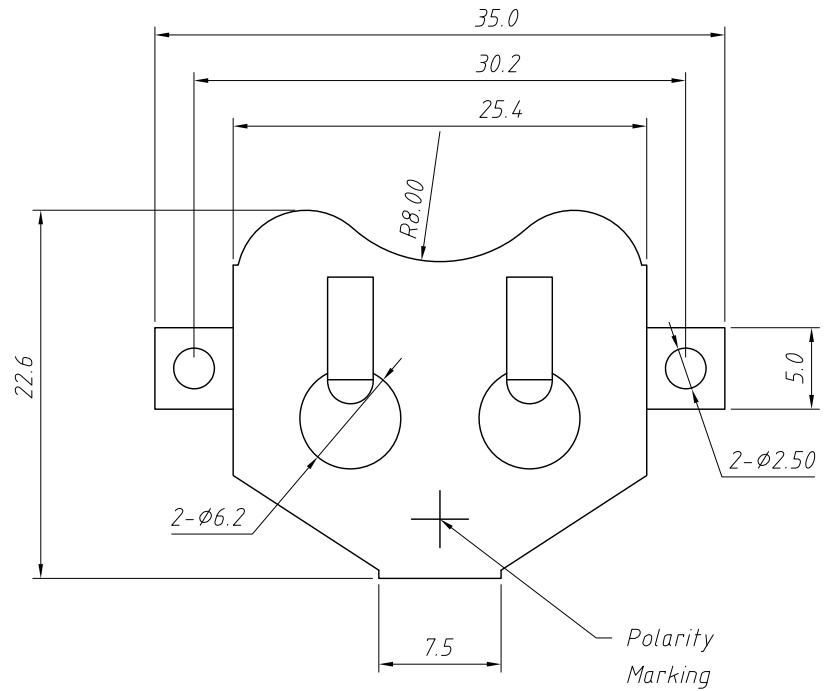

Notes:
 1:Material:
T=0.30mm Phosphor Bronze,Nickel Plated.
 2:Electric:
 Current Rating:3A AC/DC
 Dielectric Voltage:500V AC One Sec Level
 Contact Resistance:30 Milliohms Max.
 Insulator Resistance:100 Milliohms Min
 Operating Temperature:-40°C ~ +105°C
 Humidity:40°C And 90-95% RH For 48 Hours

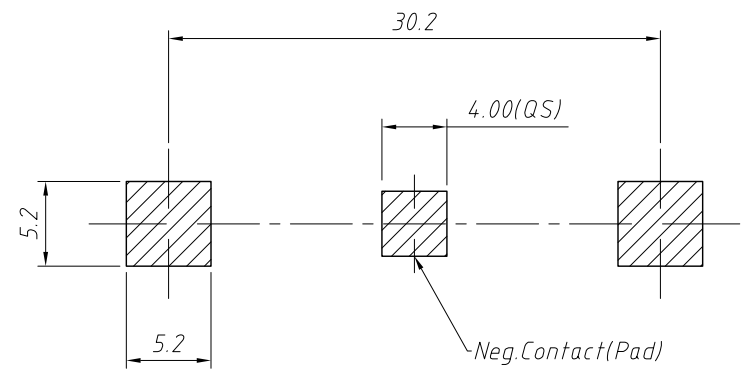

Recommended PCB Layout
 Tolerance:±0.05mm

ANGLE TOLERANCE	PROJECTION	Description:	CR2477 Coin Cell Retainers	
±3°				
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS5-CR2477-06
x.x ±0.30	SHEET SIZE	A4		
x.xx ±0.20	Draw:	Daniel	2023-02-27	NingBo KLS ELECTRONIC CO.,L TD.
x.xxx ±0.10	Check:	Daniel	2023-02-27	