RoHS Compliance

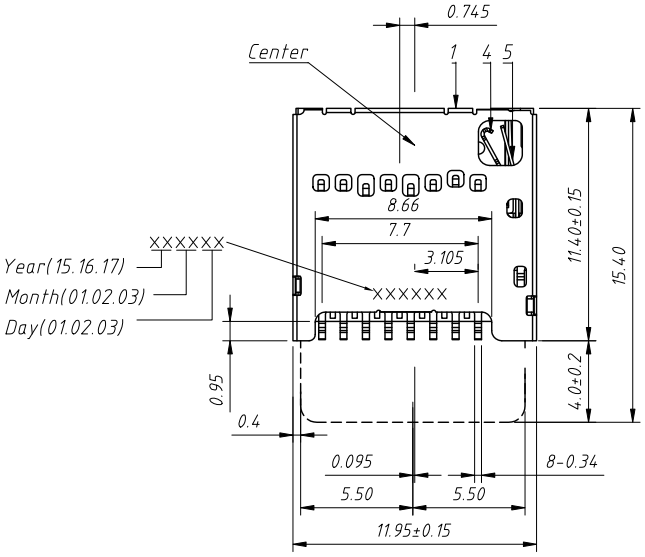

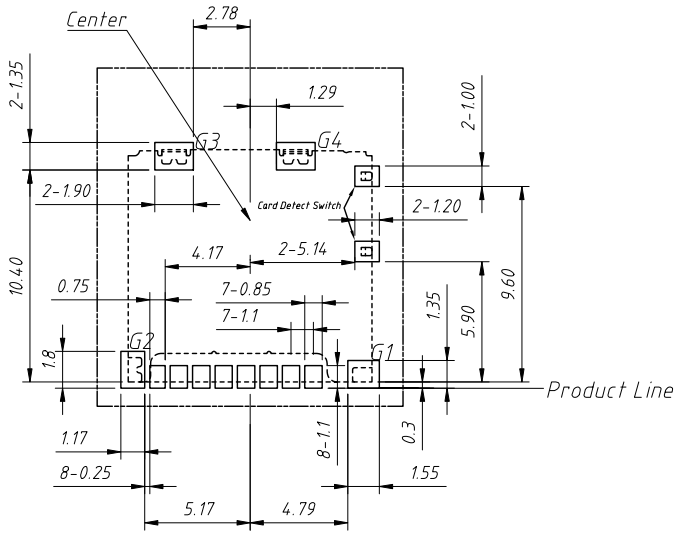

Material:
1.Metal Shell:
Stainless Steel Nickel Overall 50u"
2.Housing: Liouid Crystal Polymer
Black Color UL94V-0
3.Contact Terminals:Phosphor Bronze
Contact:Gold Flash
Solder Tail:Gold 1u"Min
Under Plated Nickel 50u"
4.Detect Terminal:Phosphor Bronze
Contact:Gold Flash
Solder Tail:Gold 1u" Min
Under Plated Nickel 50u"
5.Switch Terminal:Phosphor Bronze
Contact:Gold Flash
Solder Tail:Gold 1u" Min
Under Plated Nickel 50u"
Coplanarity Of Solder Tails:0.1mm Max.
Misalignment Of Solder Tal From"Z"
Upper Direction 0.05mm Max,
Lower Direction 0.1mm Max.



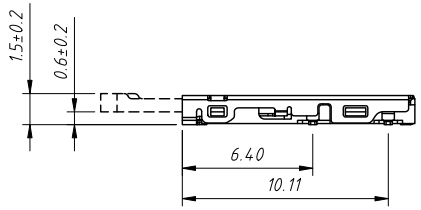

Micro SD CARD PIN-MAP

Pin Number	Description
T1	DAT2
T2	CD/DAT3[2]
T3	CMD
T4	Voo
T5	CLK
T6	Vss
T7	DAT0
T8	DAT1

Micro SD Card(Back View)



Card Insertion Conation	Card Detect Switch	Circuit Switch terminal Detect terminat
Without Card	Open	
Card insertion	Close	

ANGLE TOLERANCE	PROJECTION		Description:	MicroSD No Push 1.42 Hight
±3°				
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS1-TF-015
x.x ±0.30	SHEET SIZE	A4	XX	
x.xx ±0.20	Draw:	Daniel	2023-04-18	NingBo KLS ELECTRONIC CO.,LTD.
x.xxx ±0.10	Check:	Daniel	2023-04-18	