

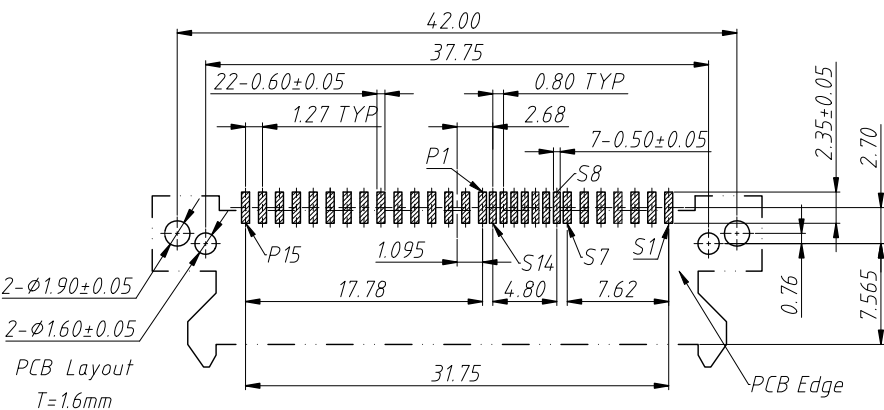
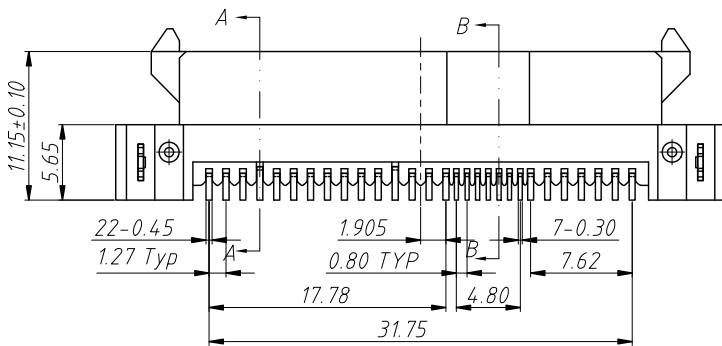


RoHS Compliance

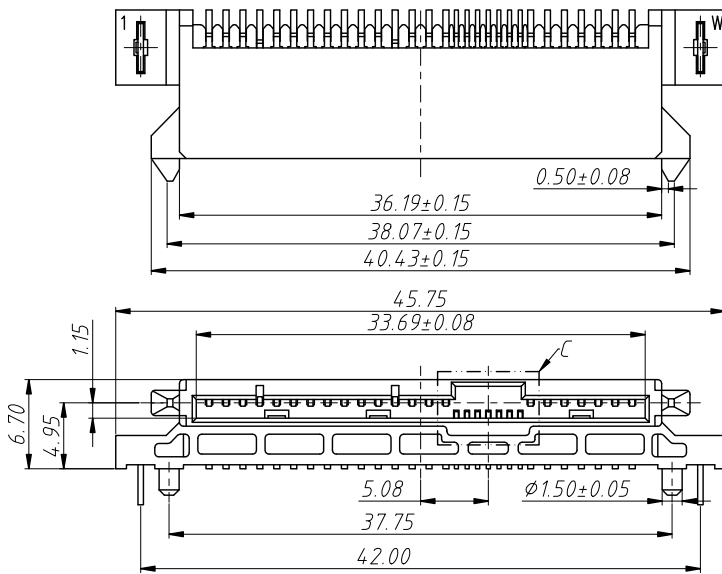


Power Segment			
PIN NO.	Type	Name	Type
P1	V3.3	P9	V5
P2	V3.3	P10	Ground
P3	V3.3	P11	Ready Led
P4	Ground	P12	Ground
P5	Ground	P13	V12
P6	Ground	P14	V12
P7	V5	P15	V12
P8	V5		


Signal Segment			
Pin NO.	Type	Name	Type
S1	Signal Ground	S8	Signal Ground
S2	TP+	S9	TS+
S3	TP-	S10	TS-
S4	Signal Ground	S11	Signal Ground
S5	RP-	S12	RS-
S6	RP+	S13	RS+
S7	Signal Ground	S14	Signal Ground




Section B-B

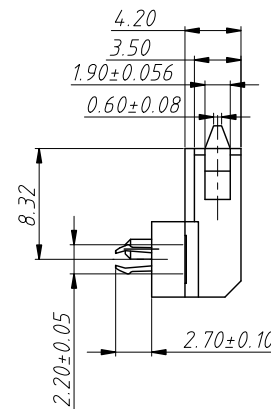

Section A-A



Detail C

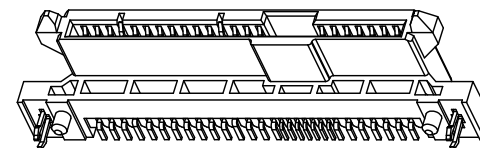

Notes:

1.Material:

Housing:LCP+50%G.F,UL 94 V-0, Black
Contact:Phosphor Bronze

Au Plating On Contact Area
Sn (100u"Min.) Plating On Solder Tail
Ni (40u"Min.) Under Plating Overall
Harpoon:Brass

Sn Plating(100u"Min.)
Over Nickel(50u"Min.).

2.Mechanical:

Insertion Force:50N Max
Withdrawal Force:20N Min
Durability:500 Cycles

3.Electrical:

Current Rating: 1.5 Ampere Per Contact
Contact Resistance:30 mΩ Max.
Insulation Resistance:1000 MΩ Min.
Dielectric Withstanding Voltage:500 VAC

4.Environmental:

Operating Temperature:0°C ~ +55°C

Order Information

L-KLS1-SAS004-29RTxx

RoHS

Connector

Pin Number:29Pin

Installation Method

RT:Horizontal SMT

Gold Plating:

00-Gold Flash 03-Au 3u"

15-Au 15u" 30-Au 30u"

ANGLE TOLERANCE	PROJECTION	Description:
±3°		SAS-29 PIN, R/A, Horizontal SMT
GENERAL TOLERANCE	UNITS	mm
x.x ±0.30	SHEET SIZE	A4
x.xx ±0.20	Draw:	Daniel
x.xxx ±0.10	Check:	Daniel

KLS P/N:	Description:
L-KLS1-SAS004-29RTxx	SAS-29 PIN, R/A, Horizontal SMT
NingBo KLS ELECTRONIC CO.,L TD.	