
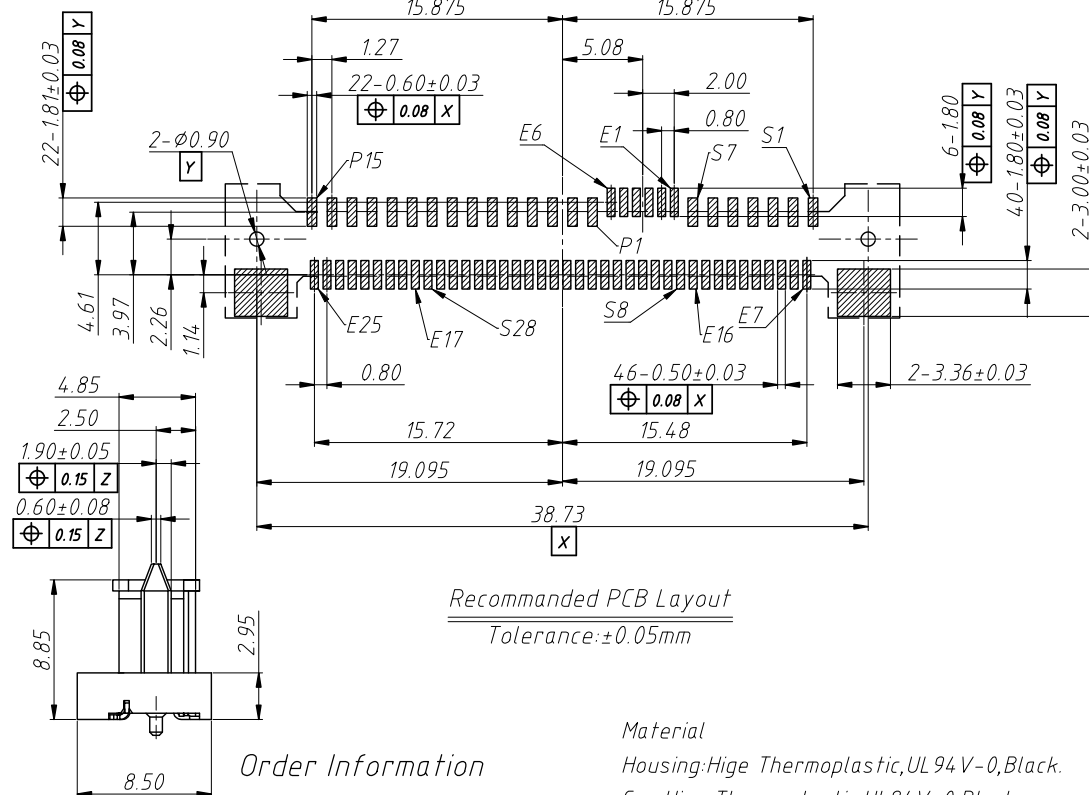


RoHS Compliance

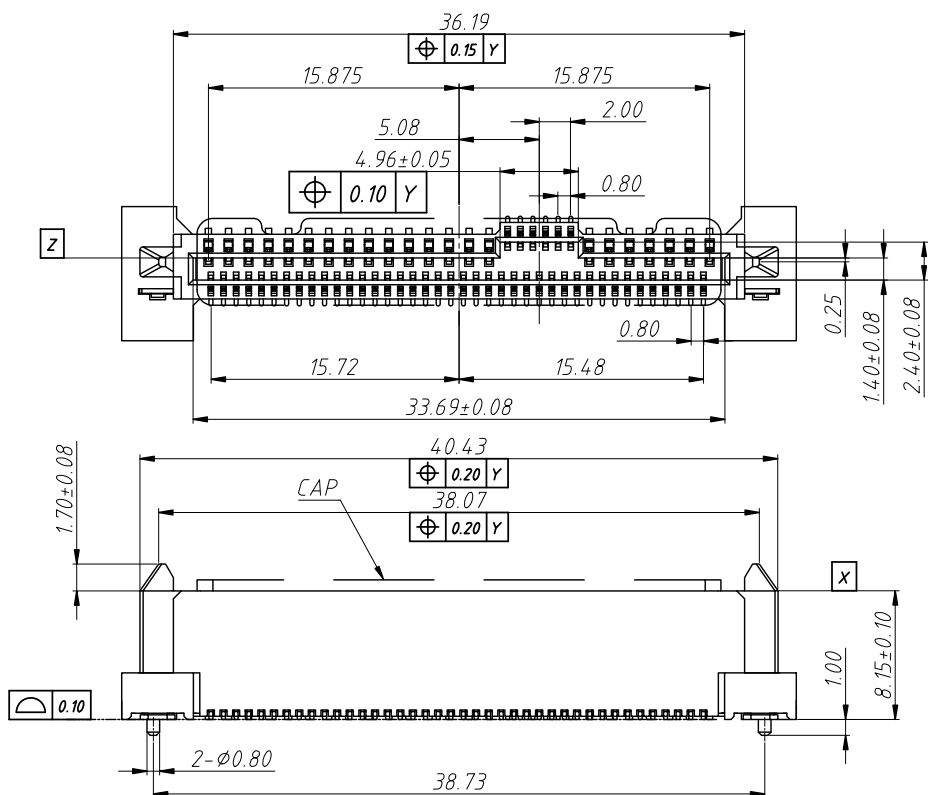

Recommended PCB Layout
Tolerance: ±0.05mm

Order Information

L-KLS1-SAS011-68VTxx

- RoHS
- Connector
- Pin Number: 68Pin
- Installation Method
- VT: Vertical SMT
- Gold Plating:
 - 00-Gold Flash
 - 03-Au 3u"
 - 15-Au 15u"
 - 30-Au 30u"

Material
 Housing: Hige Thermoplastic, UL 94 V-0, Black.
 Cap: Hige Thermoplastic, UL 94 V-0, Black.
 Terminal: Copper Alloy,
 Selective Au On Contact Area
 (See Order Information)
 100u" Min. Sn Plated On Solder Tail Area.
 Both Over 50u" Min. Ni Underplated Overall

Board Lock: Copper Alloy,
 100u" Min Sn Plated On Solder Tail Area,
 Both Over 50u" Min Ni Underplated Overall.
 Packing: Tape & Reel

ANGLE TOLERANCE	PROJECTION	Description:	PCIE SAS 68 Pin Vertical SMT
±3°			
GENERAL TOLERANCE	UNITS	mm	KLS P/N:
x.x ±0.30	SHEET SIZE	A4	XX
x.xx ±0.20	Draw:	Daniel	2023-05-08
x.xxx ±0.10	Check:	Daniel	2023-05-08

