




PCB Layout



TOP EMI Shield



With Shield

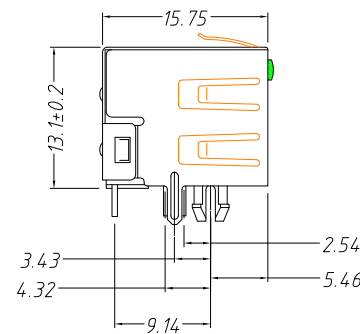


With EMI Shield

Material:
Housing: PBT+Glass Filled Polyester
Flammability Rating : UL94 V-0
Contacts: Phosphor Bronze $\phi 0.46\text{mm}$
Plating: Gold Plating
Shield: Brass, Tin Plating

Electrical:
Voltage Rating: 125VAC
Current Rating: 1.5A
Contact Resistance: 30m Ω Max.
Insulation Resistance: 500M Ω Min.
Dielectric Strength: 1000VAC Rms 50Hz, 1 Min.
Durability: 600 cycles Min.
Operation Temperature: -40°C ~ +85°C

Order Information

L-KLS12-108-8P8C- 1x4 -X- G/Y-2-XX

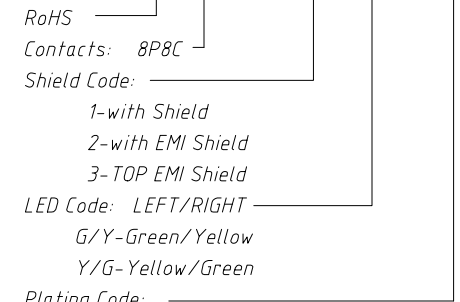

Plating Code:
01-Fu" Gold Plating
02-3u" Gold Plating
03-6u" Gold Plating
04-15u" Gold Plating
05-30u" Gold Plating

GENERAL TOLERANCE	PROJECTION		Description:
X ±0.30	UNITS	mm	Modular jacks with LED, RJ45-8P8C 1x4 with SHELL
X ±0.25	SCALE	1:1	
.XX ±0.20	Draw by:	Jenny	
ANGLE TOLERANCE	Check by:	Daniel	KLS P/N: L-KLS12-108-8P8C-1x4-X-X/X-2-XX
X ±2°	Date	2019-12-26	NingBo KLS ELECTRONIC CO.,LTD.
X ±2°	SHEET	1 OF 1	
.XX ±1°			