

With Shield

TOP EMI Shield


Material: PBT+Glass Filled Polyester
 Housing: PBT+Glass Filled Polyester
 Flammability Rating : UL 94V-0
 Contacts: Phosphor Bronze Ø0.46mm
 Plating: Gold Plating
 Shield: Brass, Tin Plating

Electrical:
 Voltage Rating: 125VAC
 Current Rating: 15A
 Contact Resistance: 30mΩ Max.
 Insulation Resistance: 500MΩ Min.
 Dielectric Strength: 1000VAC Rms
 50Hz, 1Min.

Durability:
 600 cycles Min.
 Operation Temperature:-40°C ~ +70°C

Order Information

L-KLS12-108-8P8C-1x2-X-G/Y-0-XX
 RoHS
 Contacts: 8P8C
 Shield Code:
 1-with Shield
 2-with EMI Shield
 3-TOP EMI Shield
 LED Code: LEFT/RIGHT
 G/Y-Green/Yellow
 Y/G-Yellow/Green
 Plating Code:
 01-Fu" Gold Plating
 02-3u" Gold Plating
 03-6u" Gold Plating
 04-15u" Gold Plating
 05-30u" Gold Plating

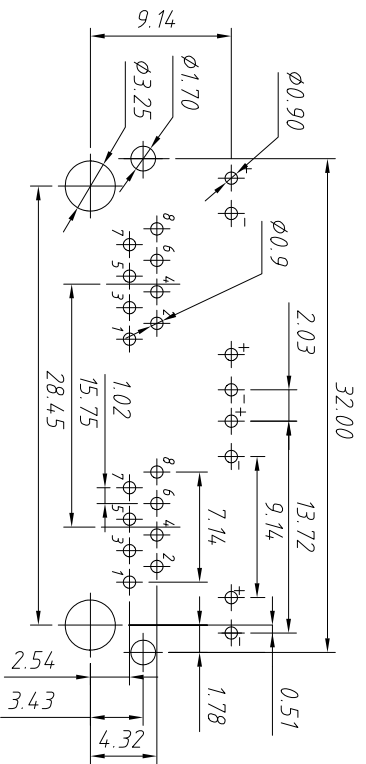

With EMI Shield

PCB Layout

GENERAL TOLERANCE		PROJECTION	Description:
X	±0.30		Modular jacks with LED, R145-8P8C with SHELL
.X	±0.25		
XX	±0.20	SCALE	KLS P/N: L-KLS12-108-8P8C-1x2-X-X/X-0-XX
ANGLE TOLERANCE		Draw by: Jenny	Ningbo KLS ELECTRONIC CO.,L.TD.
X	±3°	Check by: Daniel	
.X	±2°	Date	2019-12-26
XX	±1°	SHEET	1 OF 1

