


# FUSE AND FUSE HOLDER

## Φ3.6x10 Glass Tube Fuse Series

KLS5-1010 Glass Tube Fuse (Slow Blow) Series

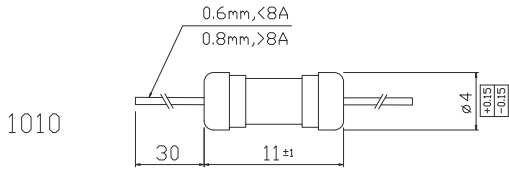


### ELECTRICAL CHARACTERISTICS

RATING		BLOWING TIME
2.1In	Max	2min
2.75In	Min	400ms
	Max	10sec
4In	Min	150ms
	Max	3sec
10In	Min	20ms
	Max	150ms

Part No.	Rated Current	Mv Voltage Drop	Voltage Rated
1010-0100	100mA	1750	125V/250V
1010-0125	125mA	1500	125V/250V
1010-0150	150mA	1500	125V/250V
1010-0160	160mA	1500	125V/250V
1010-0200	200mA	1500	125V/250V
1010-0250	250mA	1000	125V/250V
1010-0300	300mA	1000	125V/250V
1010-0400	400mA	1000	125V/250V
1010-0500	500mA	1000	125V/250V
1010-0600	600mA	900	125V/250V
1010-0700	700mA	500	125V/250V
1010-0750	750mA	500	125V/250V
1010-0800	800mA	275	125V/250V
1010-1000	1A	275	125V/250V
1010-1200	1.2A	275	125V/250V
1010-1250	1.25A	275	125V/250V
1010-1500	1.5A	275	125V/250V
1010-1600	1.6A	275	125V/250V
1010-1800	1.8A	275	125V/250V
1010-2000	2A	250	125V/250V
1010-2500	2.5A	250	125V/250V
1010-3000	3A	250	125V/250V
1010-3150	3.15A	250	125V/250V
1010-3500	3.5A	250	125V/250V
1010-4000	4A	225	125V/250V
1010-5000	5A	225	125V/250V
1010-6000	6A	225	125V/250V
1010-6300	6.3A	200	125V/250V
1010-7000	7A	200	125V/250V
1010-8000	8A	200	125V/250V
1010-10000	10A	200	125V/250V
1010-12000	12A	180	125V/250V
1010-15000	15A	180	125V/250V

I-T CHARACTERISTICS CURVE  
电流-时间曲线图

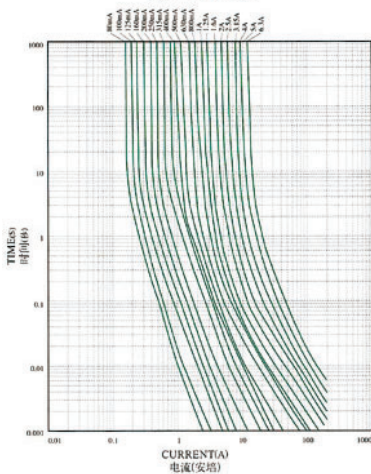

## ORDER INFORMATION

Product NO.: KLS5-1010-XXXX



Rated Current  
Lead Type: 1010=Φ4x11  
Part Number