
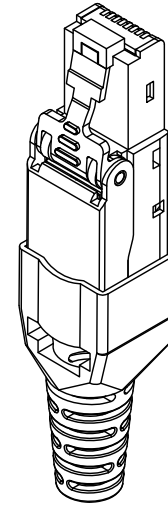
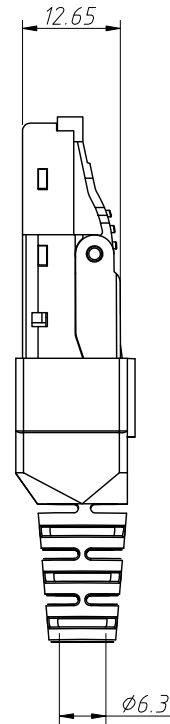
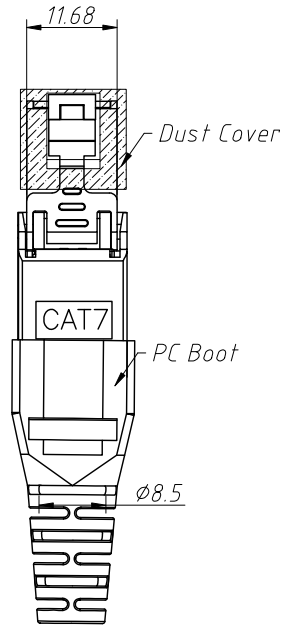
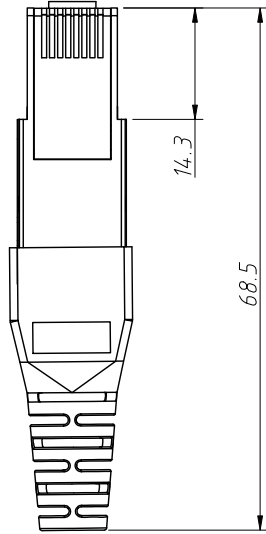


1
RoHS Compliance



Material:
 Housing: Polycarbonate
 Contact: Brass, Gold Plating
 Shield: Zinc alloy, Nickel Plating
 Electric:
 Rated Current: 125 V AC, 1.5A@25°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 100MΩ Min, 100V DC/min
 Withstand voltage: 1000V DC/700V AC/60s
 No Breakdown
 Mechanical:
 Cable: 22~24AWG
 Durability: 750 Cycles Min.
 Operation Temperature: -40°C~+70°C

ANGLE TOLERANCE	PROJECTION	Description:		
±3°		FTP CAT7 8P8C Tool-Free Modular plugs		
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS12-F7C10-8P8C
x.x ±0.20	SHEET SIZE	A4	XX	NingBo KLS ELECTRONIC CO.,L TD.
x.xx ±0.10	Draw:	Daniel	2023-06-07	
x.xxx ±0.05	Check:	Daniel	2023-06-07	