

1
RoHS Compliance

2

3

4

5

6

7

8

A

A

B

B

C

C

D

D

E

E

F






F

G

G

H

H

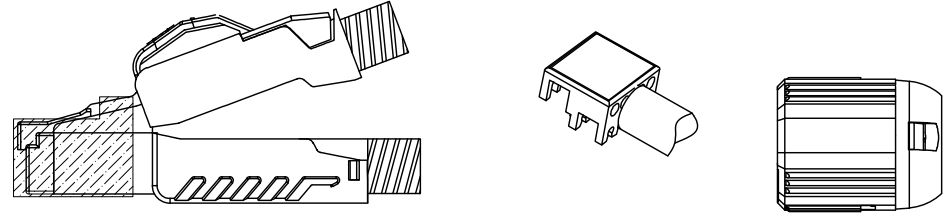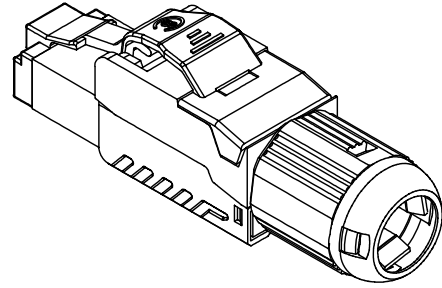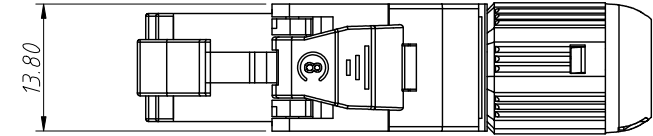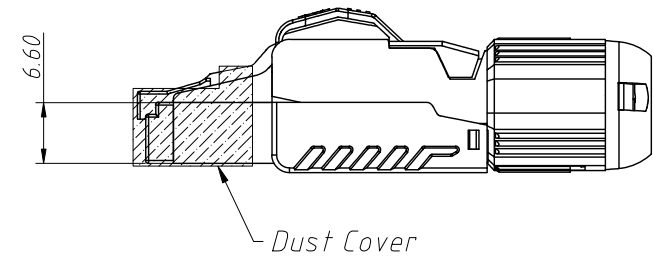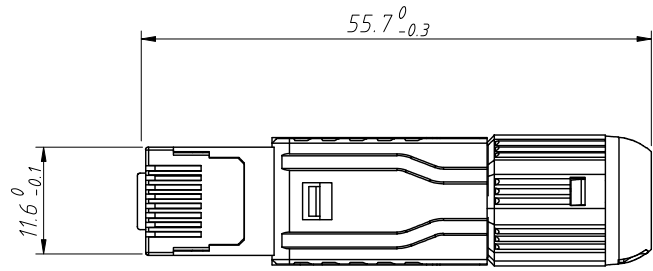

Material:
Housing: Polycarbonate
Contact: Brass, Gold Plating
Shield: Zinc alloy, Nickel Plating
Electric:
Rated Current: 125 V AC, 1.5A@25°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min, 100V DC/min
Withstand voltage: 1000V DC/700V AC/60s
No Breakdown
Mechanical:
Cable: 22~24AWG
Durability: 750 Cycles Min.
Operation Temperature: -40°C ~ +70°C

ANGLE TOLERANCE	PROJECTION		Description:	
±3°			FTP CAT8 8P8C Tool-Free Modular plugs	
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS12-F8C10-8P8C
x.x ±0.20	SHEET SIZE	A4	XX	
x.xx ±0.10	Draw:	Daniel	2023-06-07	
x.xxx ±0.05	Check:	Daniel	2023-06-07	

NingBo KLS ELECTRONIC CO.,L TD.

1

2

3

4

5

6

7

8