RoHS Compliance

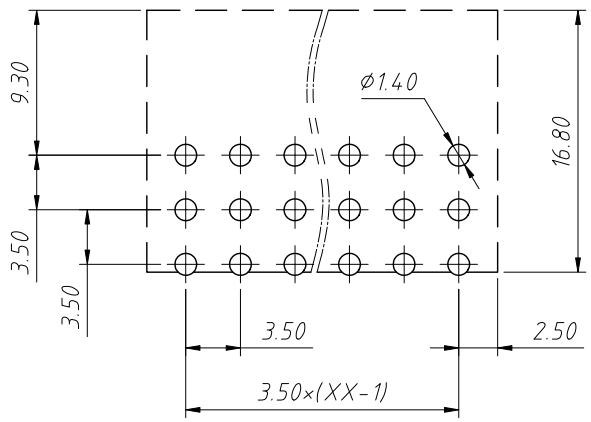

PCB LAYOUT

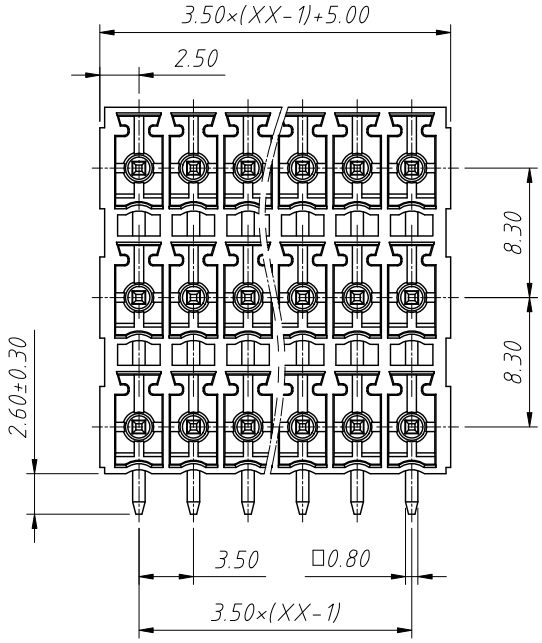

Material:
Insulation:PBT,UL94V-0
Contactor:Copper alloy,Sn plated

Electrical:
Rated Voltage:300V
Rated Current:8A
Withstanding Voltage:1600VAC(1min)

Mechanical:
Pin Dimensions:0.8×0.8mm
PCB Hole Diameter:Ø1.4mm
Operating temperature:-30°C to +120°C

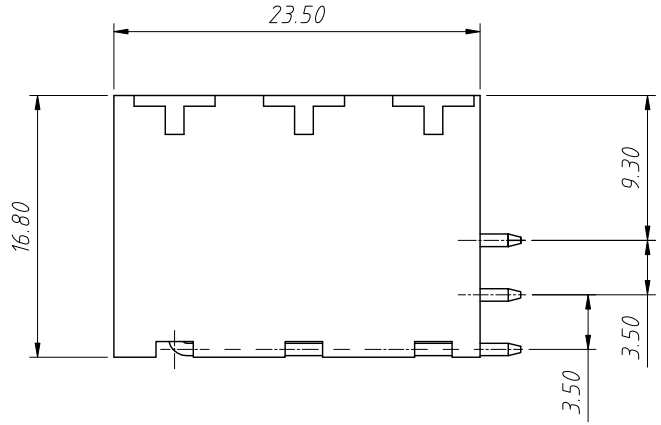

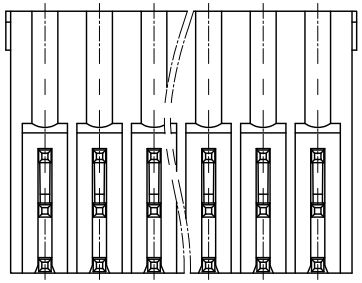

Order Information:

L-KLS2-EDAR3C-3.50-XXP-X

- L: RoHS
- Terminal Block
- Pitch:3.50mm
- No.: of 3×02~3×24 Pole
- Color:

1=Gray 2=Blue 3=Black
4=Green 5=Orange 6=Red
7=Transp 8=Yellow 9=White

ANGLE TOLERANCE	PROJECTION		Description:	3.50mm Pluggable terminal block
±3°				
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS2-EDAR3C-3.50-XXP-X
x.x ±0.30	SHEET SIZE	A4		
x.xx ±0.20	Draw:	Daniel	2023-05-05	NingBo KLS ELECTRONIC CO.,LTD.
x.xxx ±0.10	Check:	Daniel	2023-05-05	