


1  
RoHS Compliance

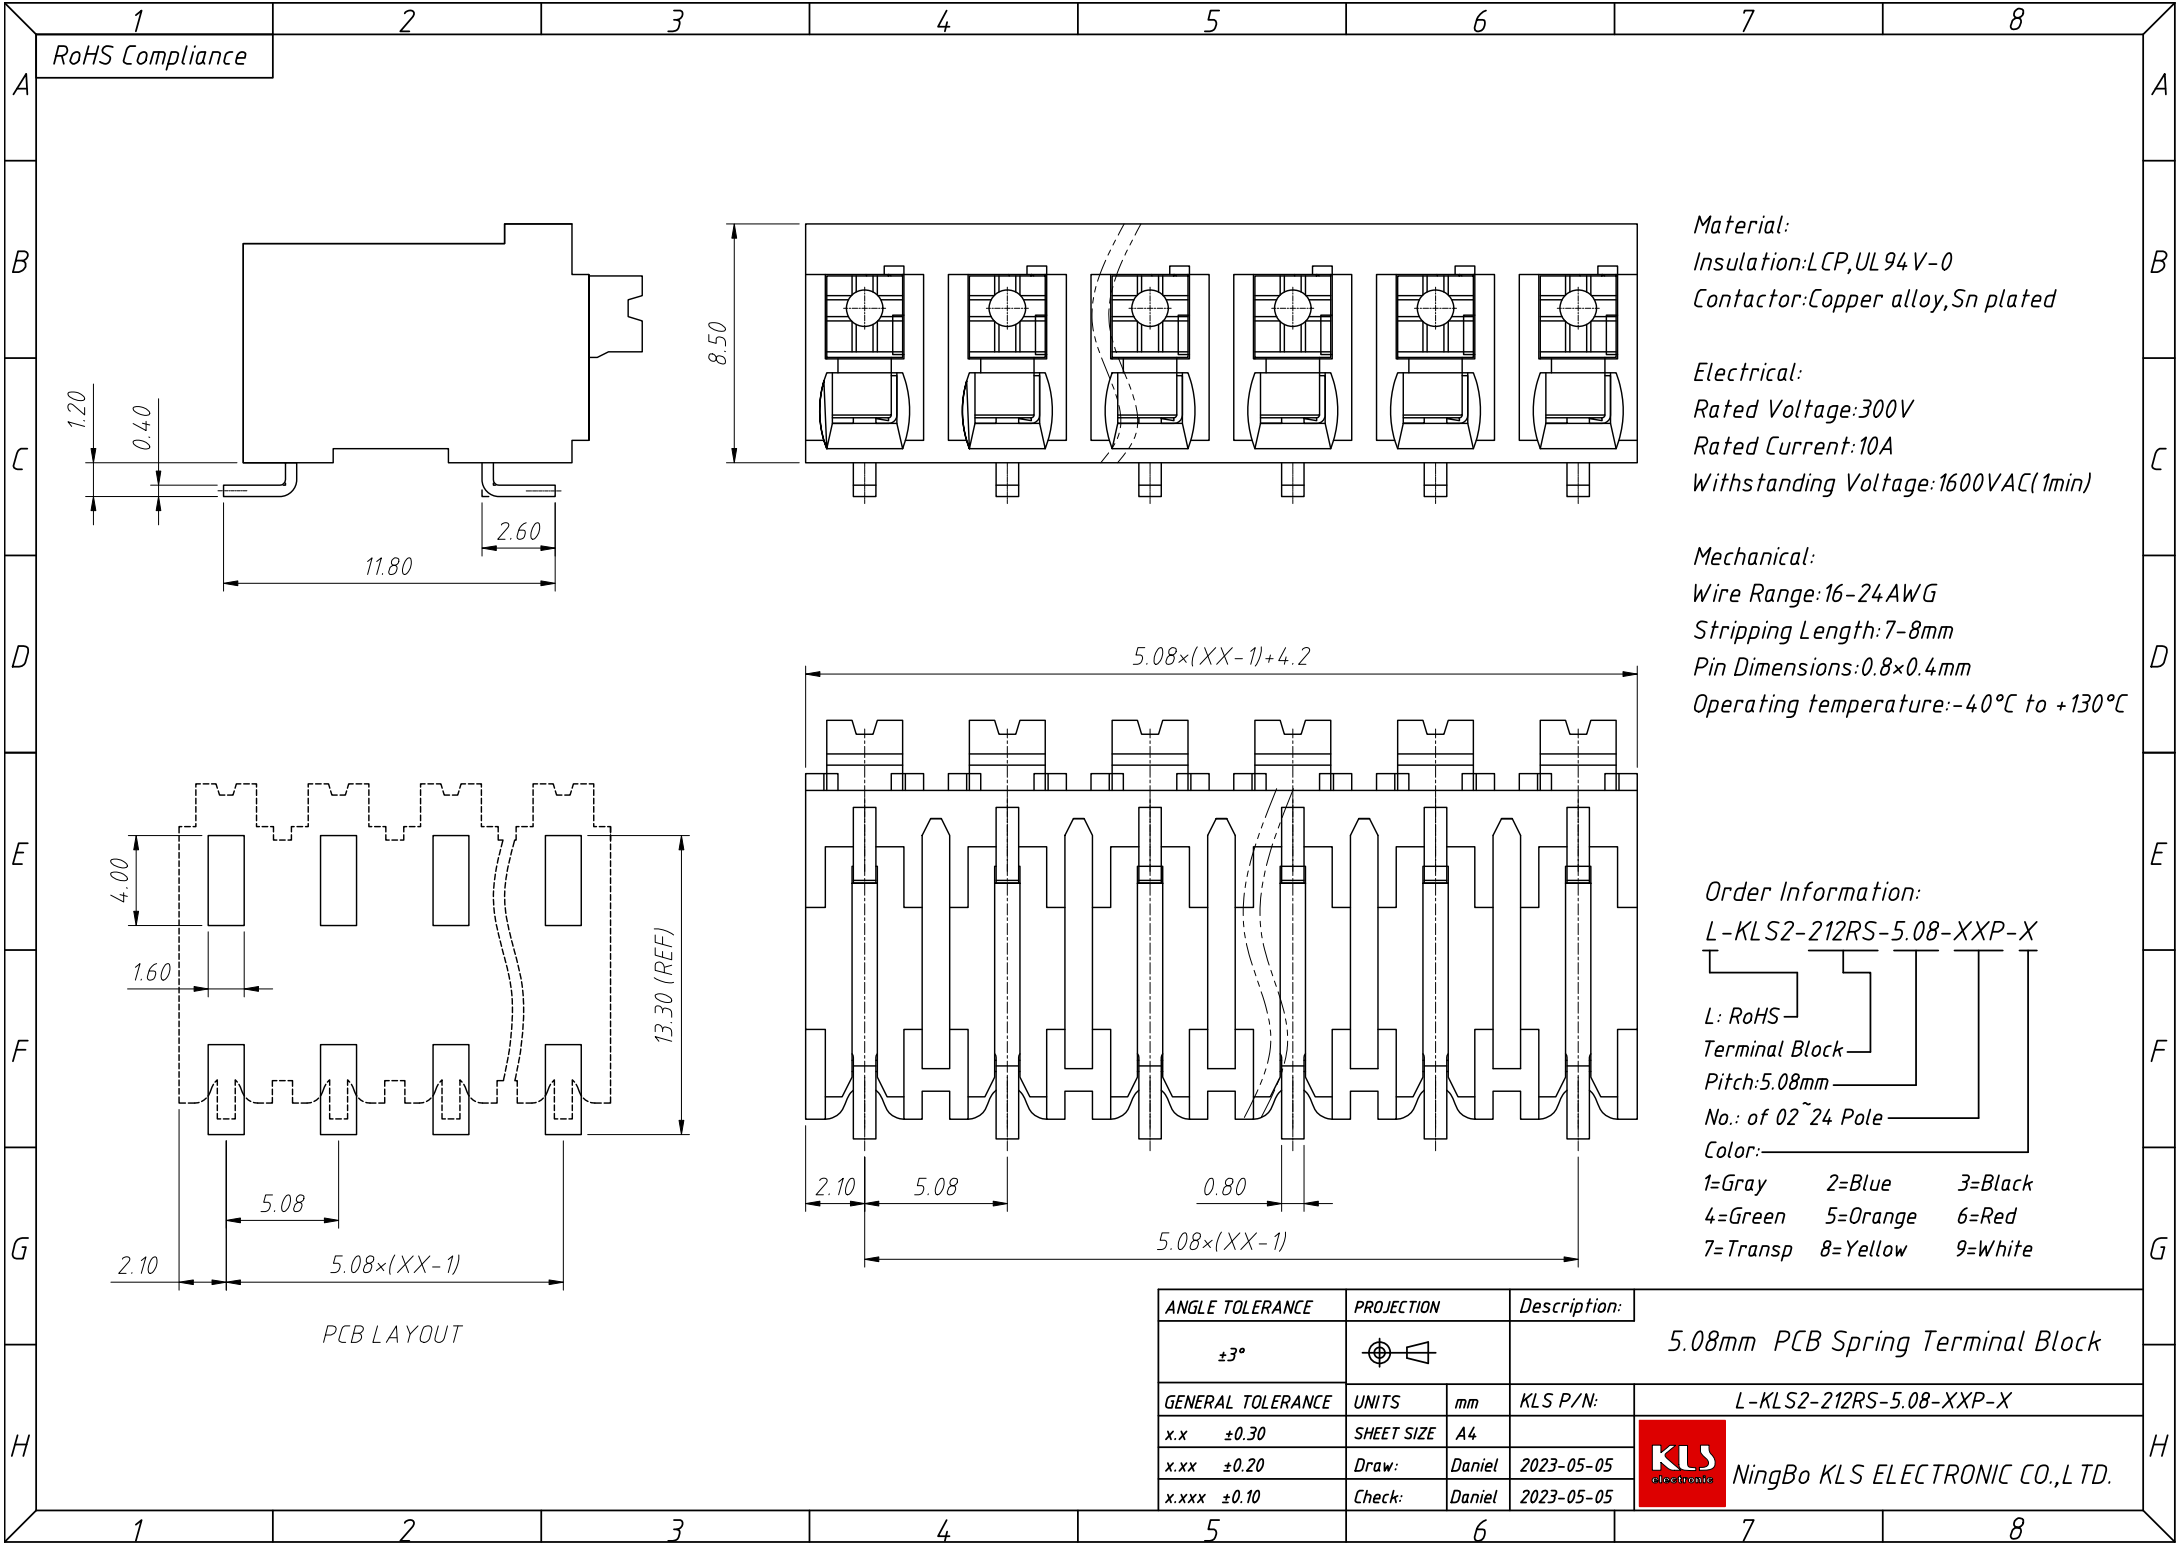

Material:  
Insulation:LCP,UL 94 V-0  
Contactor:Copper alloy,Sn plated

Electrical:  
Rated Voltage:300V  
Rated Current:10A  
Withstanding Voltage:1600VAC(1min)

Mechanical:  
Wire Range:16-24AWG  
Stripping Length:7-8mm  
Pin Dimensions:0.8×0.4mm  
Operating temperature:-40°C to +130°C

Order Information:  
L-KLS2-212RS-5.08-XXP-X

L: RoHS  
Terminal Block  
Pitch:5.08mm  
No. of 02 ~ 24 Pole  
Color:  
1=Gray 2=Blue 3=Black  
4=Green 5=Orange 6=Red  
7=Transp 8=Yellow 9=White

PCB LAYOUT

ANGLE TOLERANCE	PROJECTION	Description:	
±3°		5.08mm PCB Spring Terminal Block	
GENERAL TOLERANCE	UNITS	mm	KLS P/N:
x.x ±0.30	SHEET SIZE	A4	L-KLS2-212RS-5.08-XXP-X
x.xx ±0.20	Draw:	Daniel	2023-05-05
x.xxx ±0.10	Check:	Daniel	2023-05-05

