
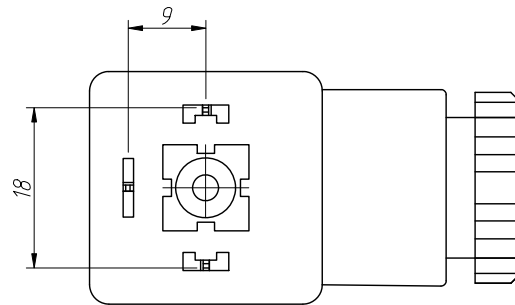
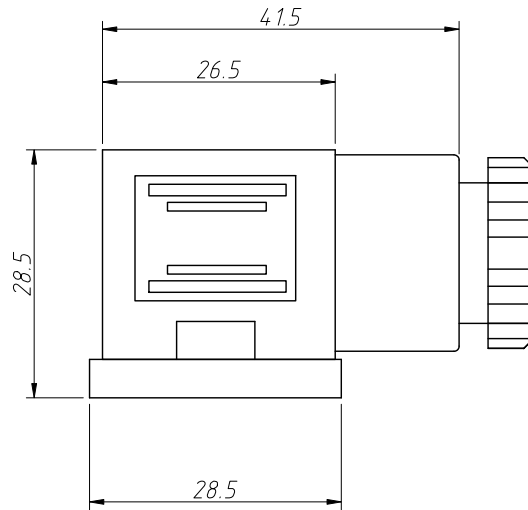



1  
RoHS Compliance

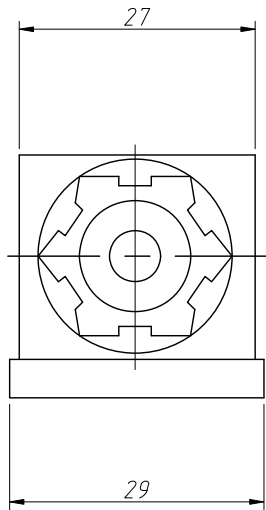

Notes:  
 Standard: DIN EN 175 301-803-A  
 Ambient Temperature: -30°C ~ +125°C  
 Termination: Screw  
 Pin Dimensions: 6.3x0.8mm, 4.8x0.8mm  
 Housing Color: Black  
 Contact Bearer Material: PA+GF  
 Housing Material: PA  
 Contact: PS With Silver Plated  
 Screw: Steel With Zn Plated  
 Seal: FKM/NBR  
 Gasket: NBR  
 Rated Voltage: 250V  
 Rated Impulse voltage: 4000V  
 Rated Current: 10A  
 Insulation Resistance: ≥100MΩ  
 Contact Resistance: ≤4mΩ  
 IP Rating: IP 65 in locked condition  
 Cable Gland: PG9 / PG11  
 Suitable Cables (Dia): 4.5 ~ 6.0mm / 6.0 ~ 9.0mm  
 Conductor Size: 1.5mm<sup>2</sup> Max

Order Information

L-KLS15-SVCP01-2+PE-PG9-B

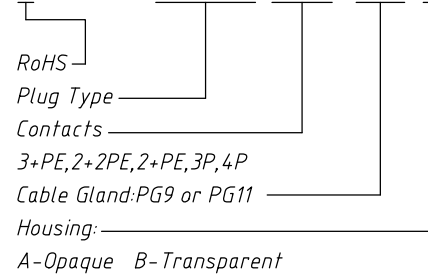

Contacts	3+PE	2+2PE	2+PE	3P	4P
Certification	cRU <sup>us</sup> ECBT2.E364453				
Pin layout (Female)					

ANGLE TOLERANCE	PROJECTION	Description:	Solenoid Valve, Valve Plug, Type A, Female Field Wirable Assembly, PG9 / PG11
±3°			
GENERAL TOLERANCE	UNITS	mm	KLS P/N:
x.x ±0.30	SHEET SIZE	A4	xx
x.xx ±0.20	Draw:	Daniel	2023-06-27
x.xxx ±0.10	Check:	Daniel	2023-06-27

**KLS** NingBo KLS ELECTRONIC CO.,L TD.