

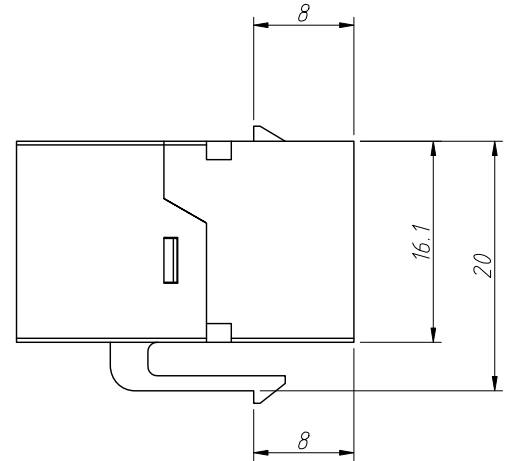
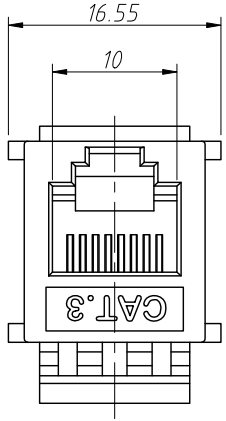


1
RoHS Compliance

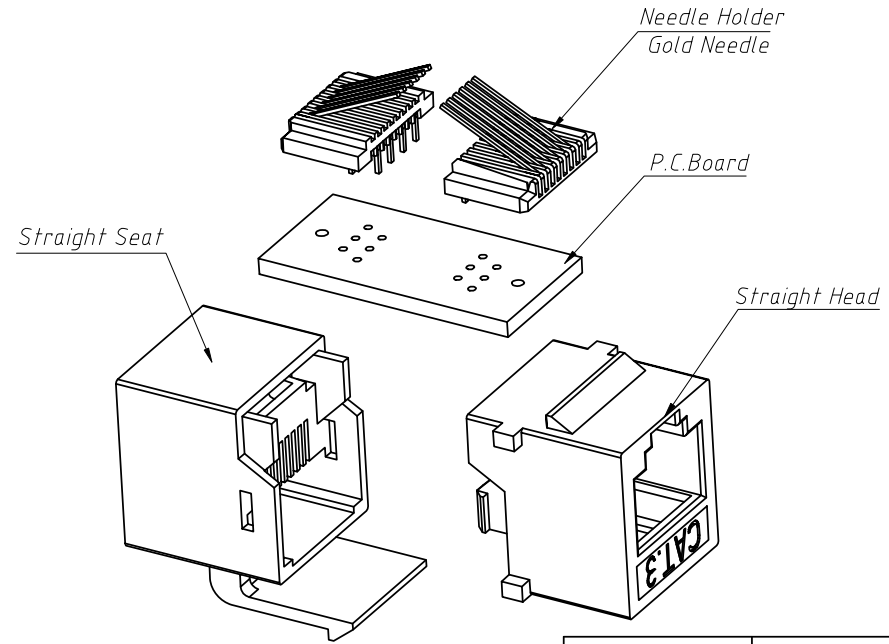

Notes:
 1.Material:
 Housing:PC,UL 94 V-2
 Contact:Phosphor Bronze,Gold Plated

 2.Electric:
 Suitable Wire Diameter: $\phi 0.35 \sim 0.65\text{mm}$
 Contact Resistance: $20\text{m}\Omega$ Max
 Insulation Resistance: $500\text{M}\Omega$ Min
 Withstand Voltage Strength:
 DC600 V (AC400 V) For 1 Minute Without
 Breakdown Or Arcing Phenomenon
 Electrical Transmission Performance:
 In Accordance With ANSI/TIA 568C CAT3

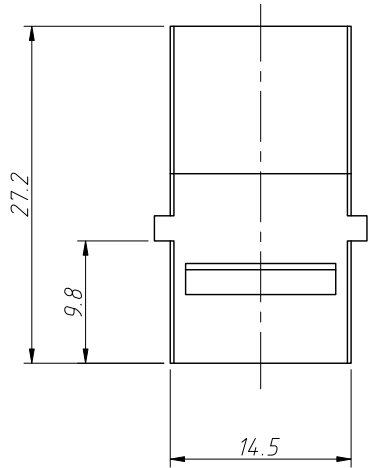

ANGLE TOLERANCE	PROJECTION	Description:	CAT3 6P6C Keystone Jacks	
$\pm 3^\circ$				
GENERAL TOLERANCE				
xx ± 0.15	UNITS	mm	KLS P/N:	L-KLS12-DK6014-6P6C
x ± 0.12	SHEET SIZE	A4	XX	
x.x ± 0.09	Draw:	Daniel	2023-06-12	
x.xx ± 0.06	Check:	Daniel	2023-06-12	
			NingBo KLS ELECTRONIC CO.,L TD.	