
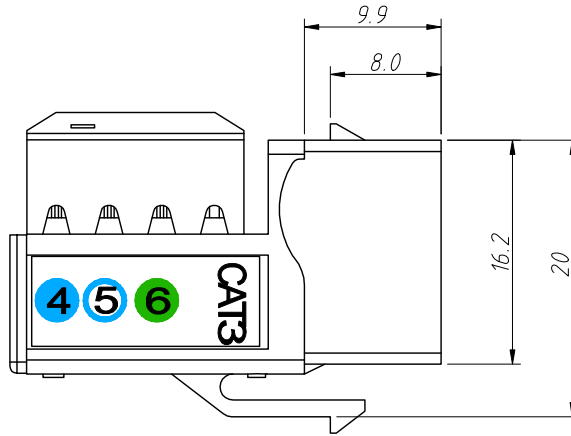


1
RoHS Compliance

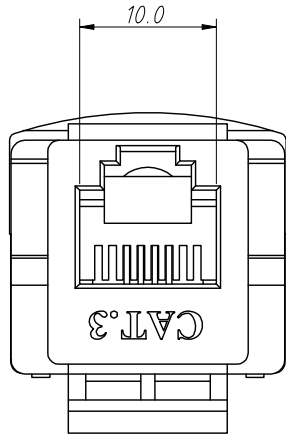

Notes:

1.Material:

Housing:PC,UL 94V-2

Contact:Phosphor Bronze,Gold Plated

2.Electric:

Suitable Wire Diameter: $\phi 0.35 \sim 0.65\text{mm}$

Contact Resistance: $20\text{m}\Omega$ Max


Insulation Resistance: $500\text{M}\Omega$ Min

Withstand Voltage Strength:

DC600 V (AC400 V) For 1 Minute Without
Breakdown Or Arcing Phenomenon

Electrical Transmission Performance:

In Accordance With ANSI/TIA 568C CAT3

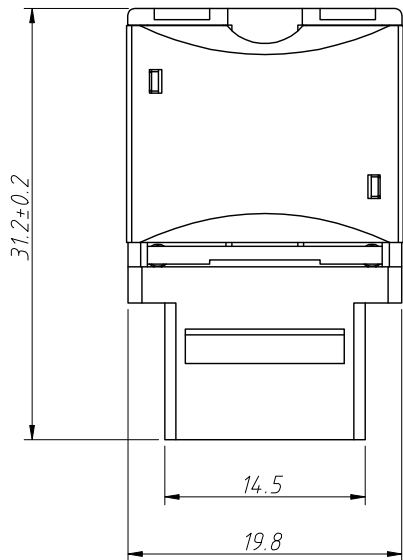

ANGLE TOLERANCE	PROJECTION	Description:		
$\pm 3^\circ$		CAT3 8P4C Keystone Jacks		
GENERAL TOLERANCE		UNITS	mm	KLS P/N:
xx ± 0.2				L-KLS12-VK4006-8P4C
x ± 0.16		SHEET SIZE	A4	XX
x.x ± 0.12	Draw:	Daniel	2023-06-12	
x.xx ± 0.08	Check:	Daniel	2023-06-12	



NingBo KLS ELECTRONIC CO.,L TD.