
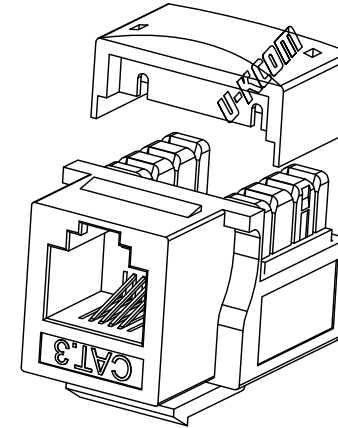
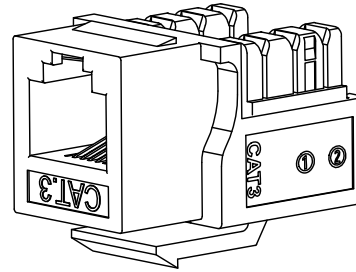
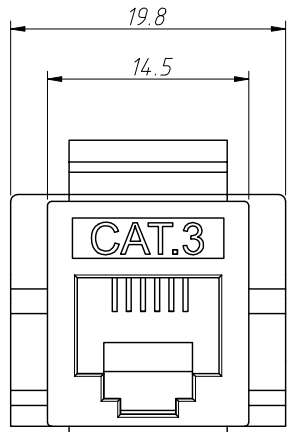


1 RoHS Compliance

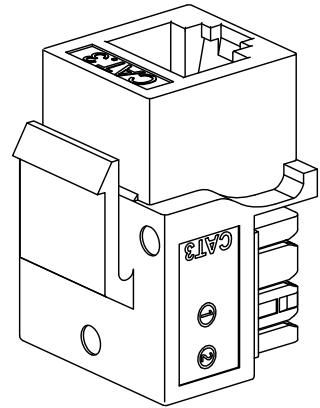

Notes:





1.Material
 Housing:ABS
 Insert:ABS
 PCB:FR-4 T=1.6mm
 Contact:Phosphor Bronze
 Stamp Pin,T=0.30mm
 IDC Contact:Phosphor Bronze
 T=0.50mm Tin Plating
 RJ45 Jack Life:750 Times Min
 IDC Life:200 Times Min
 Wire:AWG 22~24

2.Electrical:

Voltage Rating:125 VAC RMS
 Current Rating:1.5 AMP
 Contact Resistance:100mΩ Max
 Insulation Resistance:
 1000 MΩ Min @ 500 VDC
 Dielectric Strength:
 750 VAC RMS 60HZ 1Min

3.Environmental:

Storage:-40°C ~ +85°C
 Operation TEMP.:0°C ~ 70°C

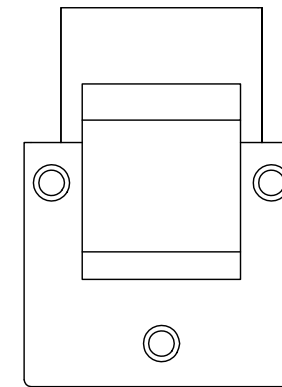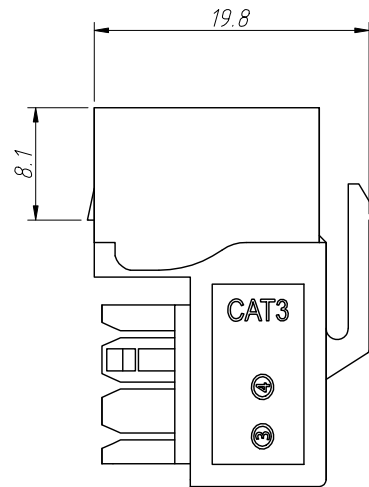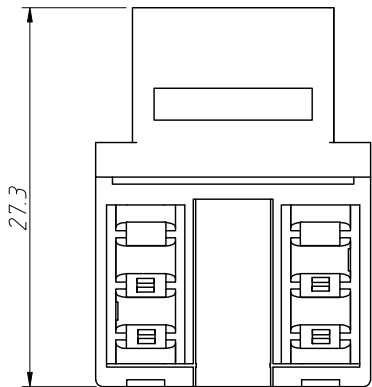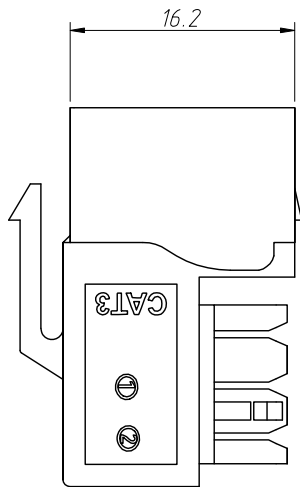

ANGLE TOLERANCE	PROJECTION	Description:
±3°		CAT3 6P4C Keystone Jacks
GENERAL TOLERANCE	UNITS	mm
x.x ±0.30	SHEET SIZE	A4
x.xx ±0.10	Draw:	Daniel
x.xxx ±0.05	Check:	Daniel
		KLS P/N: L-KLS12-VK6002-6P4C
		2023-06-12
		2023-06-12



NingBo KLS ELECTRONIC CO.,L TD.