
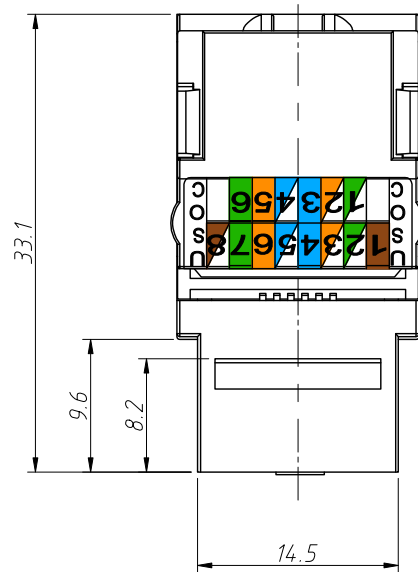
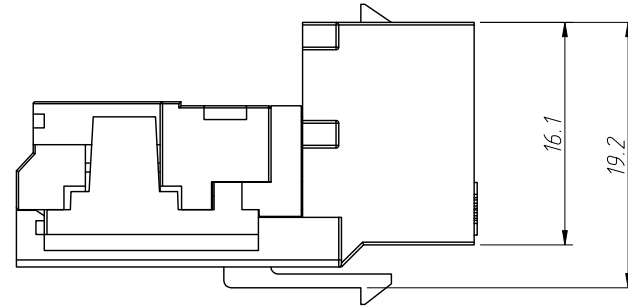


1
RoHS Compliance

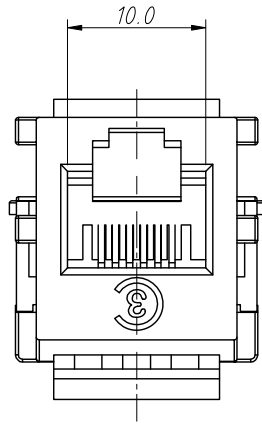

Notes:

1.Material:

Housing:PC,UL 94V-2

Contact:Phosphor Bronze,Gold Plated

2.Electric:

Suitable Wire Diameter:φ0.35~0.65mm

Contact Resistance:20mΩ Max

Insulation Resistance:500MΩ Min

Withstand Voltage Strength:

*DC600 V (AC400 V) For 1 Minute Without
Breakdown Or Arcing Phenomenon*

Electrical Transmission Performance:

In Accordance With ANSI/TIA 568C CAT3

ANGLE TOLERANCE	PROJECTION	Description:		
±3°		CAT3 6P6C Keystone Jacks		
GENERAL TOLERANCE				
xx ±0.2	UNITS	mm	KLS P/N:	L-KLS12-VK6005-6P6C
x ±0.16	SHEET SIZE	A4	XX	NingBo KLS ELECTRONIC CO.,L TD.
x.x ±0.12	Draw:	Daniel	2023-06-13	
x.xx ±0.08	Check:	Daniel	2023-06-13	