



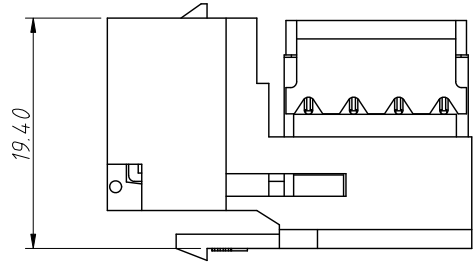
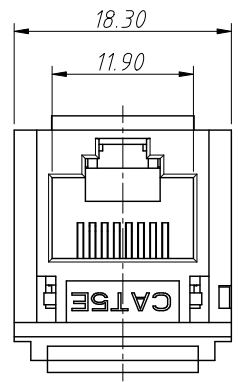


1
RoHS Compliance

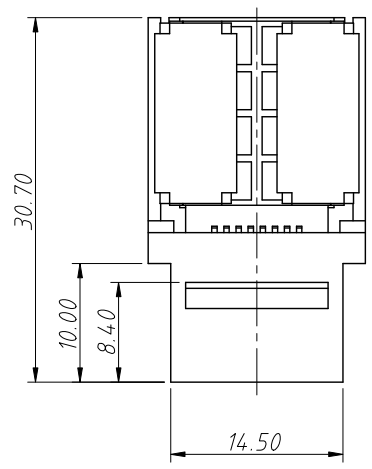

Notes:
1.Material:
Housing:PC,UL 94V-2
Contact:Phosphor Bronze,Gold Plated

2.Electric:
Contact Resistance:2.5mΩ Max
Insulation Resistance:1000MΩ Min
Withstand Voltage Strength:
DC1000 V (AC700 V) For 1 Minute Without
Breakdown Or Arcing Phenomenon
Electrical Transmission Performance:
In Accordance With TIA/EIA 568 CAT5E

ANGLE TOLERANCE	PROJECTION	Description:		
±3°		CAT5E UTP 8P8C Keystone Jacks		
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS12-DK8006-8P8C
x.x ±0.20	SHEET SIZE	A4	XX	NingBo KLS ELECTRONIC CO.,L TD.
x.xx ±0.10	Draw:	Daniel	2023-06-13	
x.xxx ±0.05	Check:	Daniel	2023-06-13	