



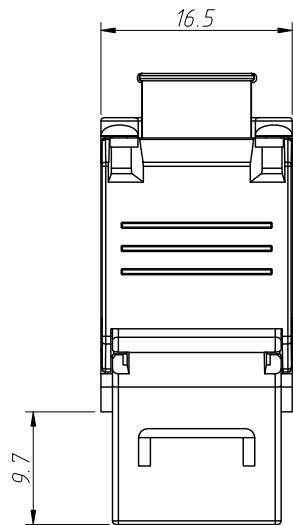
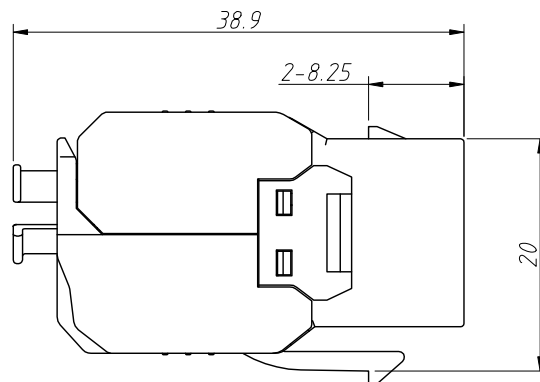


1
RoHS Compliance

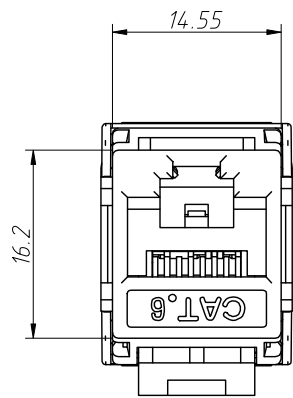

Labeling Diagram

Notes:

1.Material:

Housing:PC,UL 94 V-2

Contact:Phosphor Bronze,Gold Plated

2.Electric:

Suitable Wire Diameter:φ0.35~0.65mm

Contact Resistance:20mΩ Max

Insulation Resistance:500MΩ Min

Withstand Voltage Strength:

DC1000 V (AC700 V) For 1 Minute Without Breakdown Or Arcing Phenomenon

Electrical Transmission Performance:

In Accordance With ANSI/TIA 568C CAT6

ANGLE TOLERANCE	PROJECTION	Description:	
±3°		CAT5E UTP 8P8C Keystone Jacks	
GENERAL TOLERANCE		UNITS	mm
xx ±0.2	SHEET SIZE	A4	KLS P/N: L-KLS12-DK6C012-8P8C
x ±0.16	Draw:	Daniel	2023-06-14
x.x ±0.12	Check:	Daniel	2023-06-14
x.xx ±0.08			



NingBo KLS ELECTRONIC CO.,L TD.