



1
RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS08011	New Version Release	Jenny	2023-07-26

PCB Hole $\phi 3.0$
PCB Thickness 1.2-1.7mm

Material:
Housing:PA66,UL94V-2,Natural

- Notes:
- Working temperature: $0^{\circ}\text{C}\sim 80^{\circ}\text{C}$
 - Dipping Bibulous:2.5% at 23°C 24H 50% Humidity
 - Appearance:No defects such as burrs, sharp edges, shrinkage, etc
 - This product contains no:Pb,Hg,Cd,CrVI
 - Application: the fixed PC board on the boards,free tools

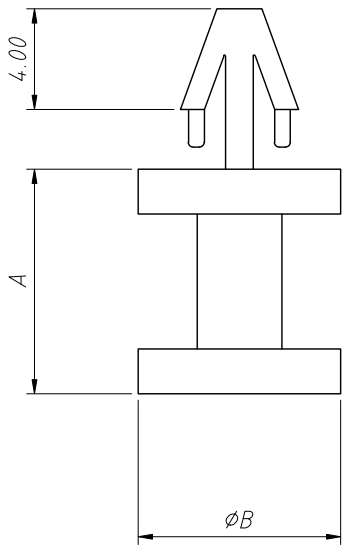

Item No.	A	B	Packing
PDC-03	3.0	6.8	2000PCS
PDC-3.5	3.5	6.8	
PDC-04	4.0	6.8	
PDC-05	5.0	6.0	
PDC-06	6.0	6.8	
PDC-6.5	6.5	6.0	
PDC-07	7.0	6.0	
PDC-08	8.0	6.8	
PDC-10	10.0	6.8	
PDC-15	15.0	6.0	

ANGLE TOLERANCE	PROJECTION	Description:	PCB spacer supports		
$\pm 3^{\circ}$					
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS8-0255-PDC-15	
x.x ± 0.30	SHEET SIZE	A4		NingBo KLS ELECTRONIC CO.,L TD.	
x.xx ± 0.20	Draw:	Jenny			2023-07-26
x.xxx ± 0.10	Check:	Daniel			2023-07-26