







1
RoHS Compliance

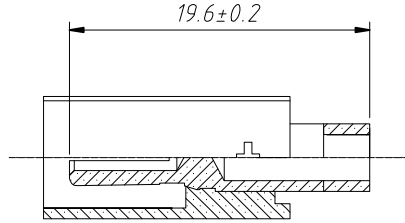

Order Information:
 L-KLS1-XT60-F-8
 L: RoHS
 Product series
 Type:
 F-Female M-Male
 Color:8-Yellow

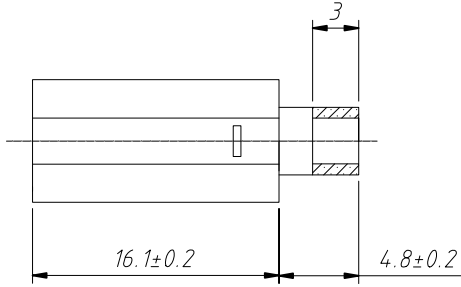

Material:
 Female Housing:PA66 UL94-V2, Yellow Color
 Male Terminal:H59 Brass, Gold Plated
 Weight:3.0g
 Package Way:500PCS/Bag

Electrical Characteristics:
 Instant current:60A
 Rated current:30A
 Rated voltage:DC500V
 Contact resistance:0.55mΩ
 Operating temperature:-20oC ~ +130oC
 Recommended wire gauge:14AWG

ANGLE TOLERANCE	PROJECTION	Description:	
±3°		XT60 Male Housing Contains Male Terminal	
GENERAL TOLERANCE	UNITS	mm	KLS P/N:
x.x ±0.30	SHEET SIZE	A4	L-KLS1-XT60-M-8
x.xx ±0.20	Draw:	Daniel	2022-08-25
x.xxx ±0.10	Check:	Daniel	2022-08-25



1
RoHS Compliance

2

3

4

5

6

7

8

A

B

C






D

E

F



G

H

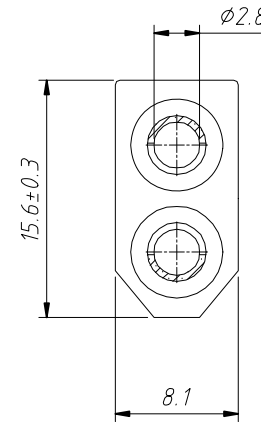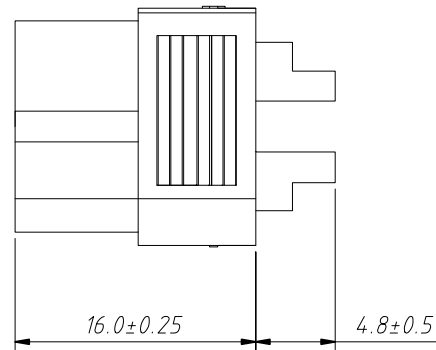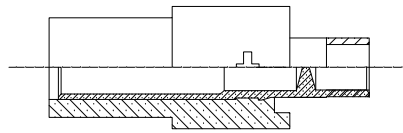

Order Information:

L-KLS1-XT60-M-8

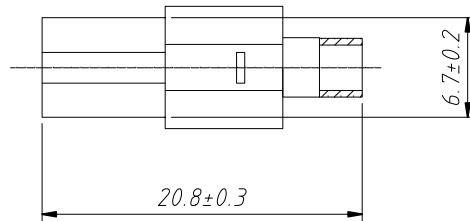

Material:

Male Housing: PA66 UL94-V2, Yellow Color

Female Terminal: H59 Brass, Gold Plated

Weight: 2.8g

Package Way: 500PCS/Bag

Electrical Characteristics:

Instant current: 60A

Rated current: 30A

Rated voltage: DC500V

Contact resistance: 0.55mΩ

Operating temperature: -20°C ~ +130°C

Recommended wire gauge: 14AWG

ANGLE TOLERANCE	PROJECTION	Description:	
±3°		XT60 Female Housing Contains Female Terminal	
GENERAL TOLERANCE	UNITS	mm	KLS P/N:
x.x ±0.30	SHEET SIZE	A4	L-KLS1-XT60-F-8
x.xx ±0.20	Draw:	Daniel	2022-08-25
x.xxx ±0.10	Check:	Daniel	2022-08-25



NingBo KLS ELECTRONIC CO.,LTD.

1

2

3

4

5

6

7

8