
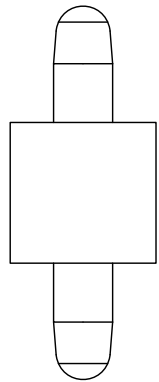
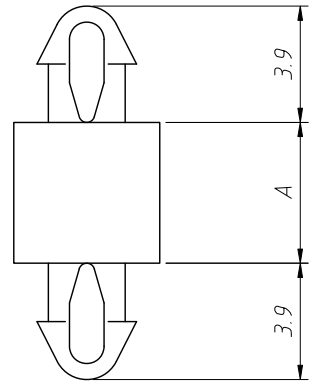
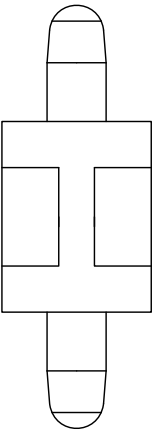


1
RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS08052	New Version Release	Jenny	2024-01-24

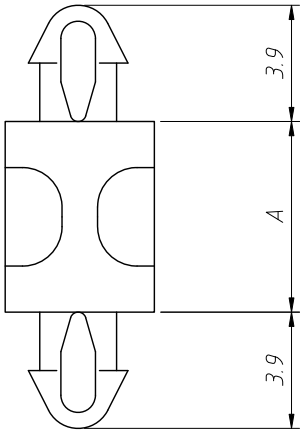

Part No.	A
0237M-LD-02	2.0
0237M-LD-03	3.0
0237M-LD-04	4.0
0237M-LD-4.5	4.5
0237M-LD-05	5.0
0237M-LD-06	6.0
0237M-LD-6.5	6.5
0237M-LD-7.5	7.5
0237M-LD-08	8.0
0237M-LD-9.5	9.5
0237M-LD-10A	10.0
0237M-LD-10	10.5
0237M-LD-12.7	12.7

Material:Nylon66,UL 94V-2,Natural
 Hole In PCB ϕ 2.5mm
 PCB Thickness 1.2~1.7mm
 Packing:2000PCS

Note:
 Made of equivalent material

ANGLE TOLERANCE	PROJECTION	Description:	PCB spacer supports	
$\pm 3^\circ$				
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS8-0237M-LD-4.5
x.x ± 0.30	SHEET SIZE	A4		
x.xx ± 0.20	Draw:	Jenny	2024-01-24	NingBo KLS ELECTRONIC CO.,L TD.
x.xxx ± 0.10	Check:	Daniel	2024-01-24	