







1
RoHS Compliance

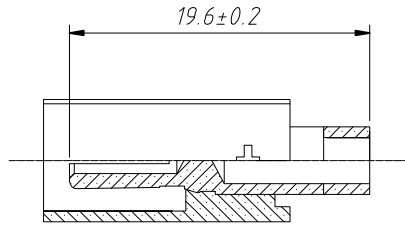

Order Information:
L-KLS1-XT60-F-8
L: RoHS
Product series
Type:
F-Female M-Male
Color:8-Yellow





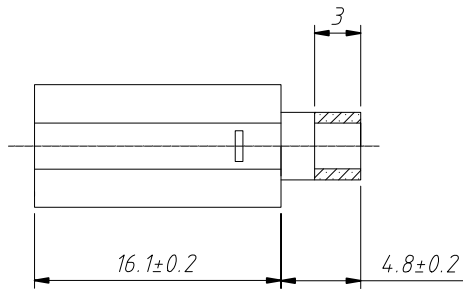


Material:
Female Housing:PA66 UL94-V2, Yellow Color
Male Terminal:H59 Brass, Gold Plated
Weight:3.0g
Package Way:500PCS/Bag

Electrical Characteristics:
Instant current:60A
Rated current:30A
Rated voltage:DC500V
Contact resistance:0.55mΩ
Operating temperature:-20oC ~ +130oC
Recommended wire gauge:14AWG

ANGLE TOLERANCE	PROJECTION	Description:	XT60 Female Housing Contains Male Terminal	
±3°				
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS1-XT60-F-8
x.x ±0.30	SHEET SIZE	A4		
x.xx ±0.20	Draw:	Daniel	2022-08-25	NingBo KLS ELECTRONIC CO.,L TD.
x.xxx ±0.10	Check:	Daniel	2022-08-25	

1
RoHS Compliance

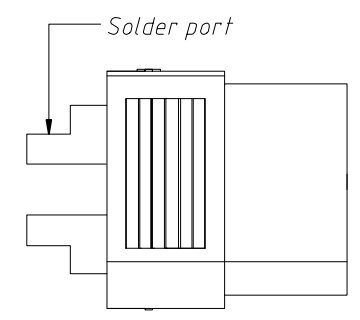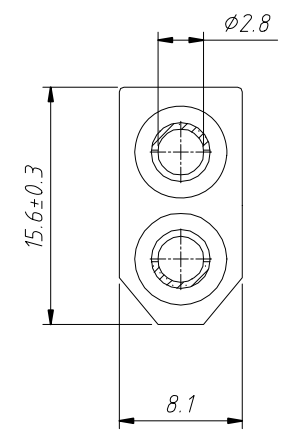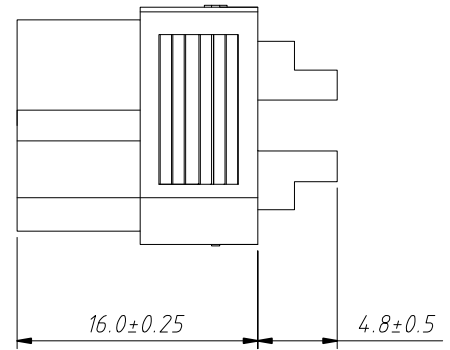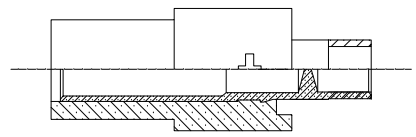

Order Information:

L-KLS1-XT60-M-8


L: RoHS

Product series

Type:

F-Female M-Male

Color:8-Yellow

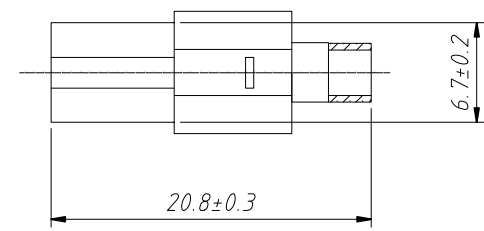

Material:

Male Housing:PA66 UL94-V2, Yellow Color

Female Terminal:H59 Brass, Gold Plated

Weight:2.8g

Package Way:500PCS/Bag

Electrical Characteristics:

Instant current:60A

Rated current:30A


Rated voltage:DC500V

Contact resistance:0.55mΩ

Operating temperature:-20oC ~ +130oC

Recommended wire gauge:14AWG

ANGLE TOLERANCE	PROJECTION	Description:	
$\pm 3^\circ$		XT60 Male Housing Contains Female Terminal	
GENERAL TOLERANCE	UNITS	mm	KLS P/N:
x.x ± 0.30	SHEET SIZE	A4	L-KLS1-XT60-M-8
x.xx ± 0.20	Draw:	Daniel	2022-08-25
x.xxx ± 0.10	Check:	Daniel	2022-08-25



NingBo KLS ELECTRONIC CO.,L TD.