
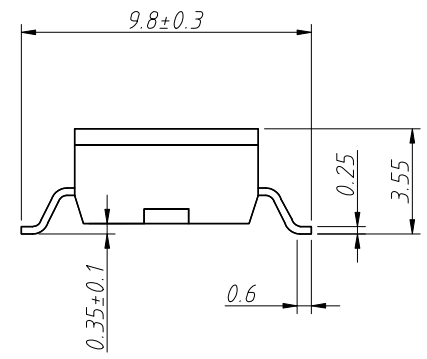



1
RoHS Compliance

2	3	4	5	6	7	8
REV	SYM	Revision Record		Appr.	Date	
V0	KLS07018	New Version Release		Song	2024-03-15	



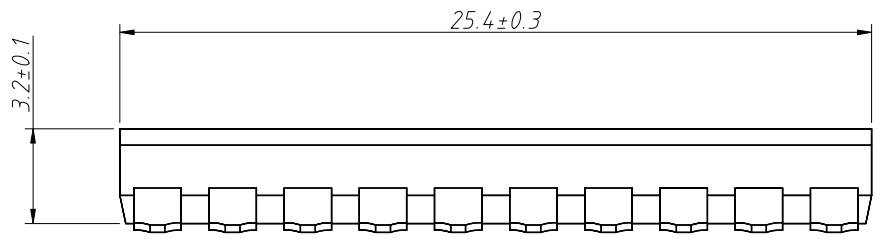


Material:
 Switch Cover:PPS,UL 94-V0
 Switch Body:PPS,UL 94-V0
 Operating Lever:PA46,UL 94-V0
 Shrapnel:Beryllium Copper,Gold-Plated
 Terminal:Brass,Gold-Plated

Specifications:
 Rated Current:
 No Switching:100mA@50VDC
 Switching:25mA @ 24 VDC
 Insulation Resistance:100MΩ @ 250VDC
 Contact Resistance:50mΩ Max
 Insulation Strength:500VAC/1min
 Operating Force:500 gf Max
 Electrical Life:2000 times
 Usage Temperature:-30°C ~ +85°C (no ice)

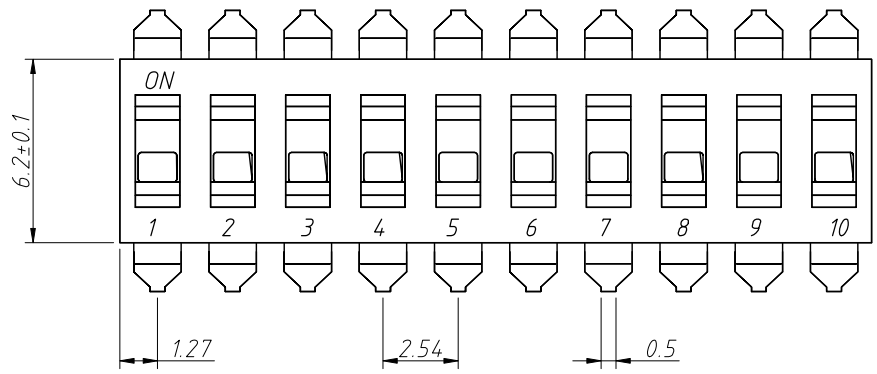

Order Information:
 L-KLS7-KLR-10-N-11

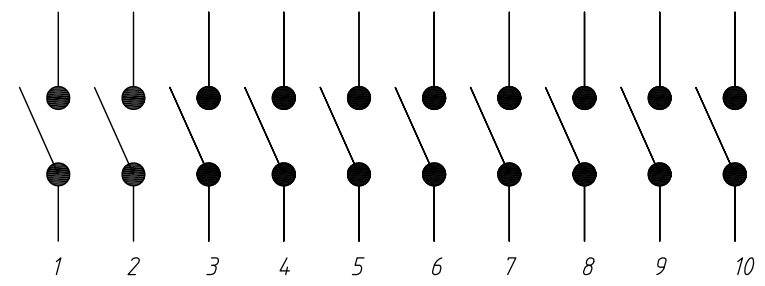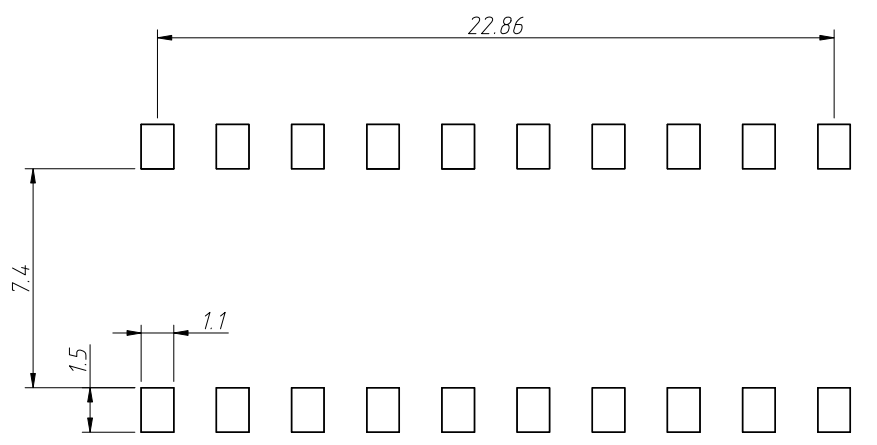

ANGLE TOLERANCE	PROJECTION	Description:			
±3°		DIP Switch			
GENERAL TOLERANCE	UNITS	mm	KLS P/N:		
x.x ±0.30	SHEET SIZE	A4	L-KLS7-KLR-10-N-11		
x.xx ±0.20	Draw:	Song	2024-03-15	NingBo KLS ELECTRONIC CO.,L TD.	
x.xxx ±0.10	Check:	Daniel	2024-03-15		