
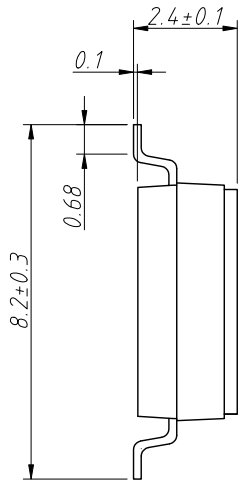


1  
RoHS Compliance



6		7		8	
REV	SYM	Revision Record		Appr.	Date
V0	KLS07018	New Version Release		Song	2023-11-07

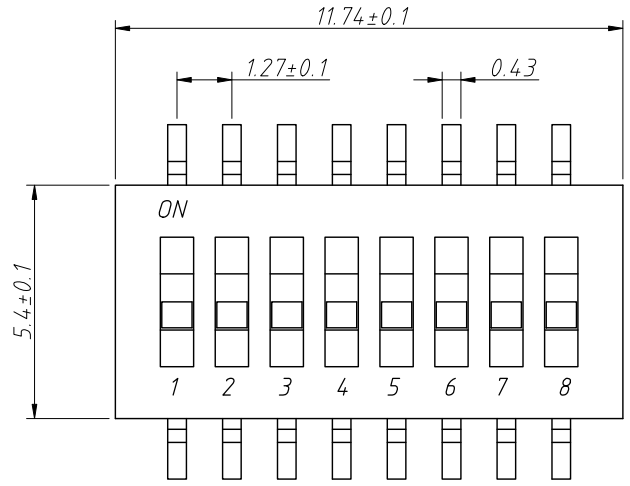

Notes:

1.Material:  
 Switch cover:High-Temperature Nylon  
 Switch base:High Humidity Nylon  
 Paddle: High Temperature Nylon  
 Terminal: Brass  
 Contact Piece:Phosphor Copper,Gold-Plated  
 Sealing Film:Polyimide

2.Electric:  
 Rated Current:100mA, 50VDC  
 Contact Resistance:100 mΩ Max  
 Insulator Resistance:100 MΩ Min  
 Durability:1000 Cycles  
 Forec:200g Max  
 Operating Temperature:-30°C ~ +80°C  
 Welding Requirements:Reflow Soldering:250°C, 5seconds

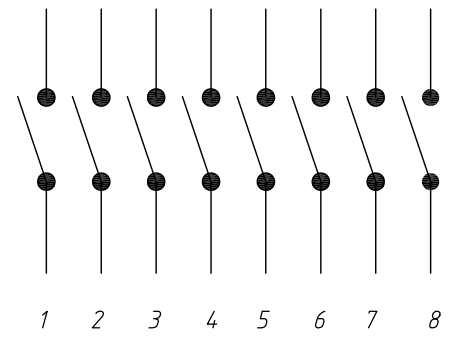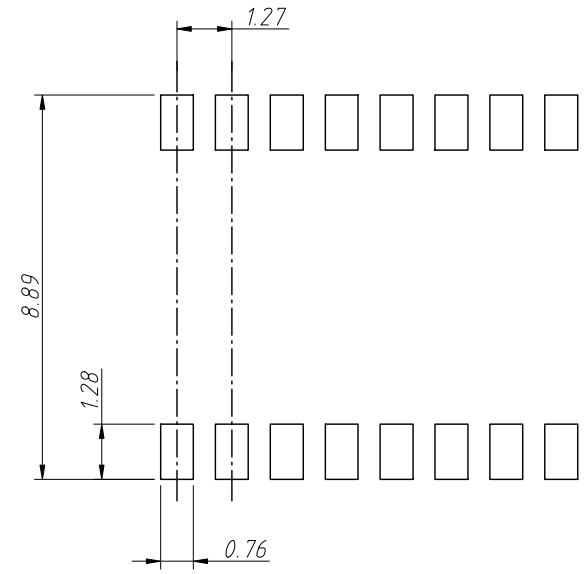

Circuit Diagram

Recommended PCB Layout  
 Tolerance:±0.05mm

ANGLE TOLERANCE	PROJECTION	Description:			
±3°		1.27 Dial Switch			
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS7-KPR-08-N-11	
x.x ±0.30	SHEET SIZE	A4			
x.xx ±0.20	Draw:	Song	2023-11-07	NingBo KLS ELECTRONIC CO.,L.TD.	
x.xxx ±0.10	Check:	Daniel	2023-11-07		