

NINGBO KLS ELECTRONIC CO; LTD


TWIST-LOCK ELECTRONIC TYPE PHOTO CONTROL MODEL:LT124L

INTRODUCTION


KLS Standard Type photocontrol were designed for the demands of HID and solid-state lighting (SSL), making them an excellent choice for LED, conventional & Electronic HID, and Induction luminaires.



DIMENSION

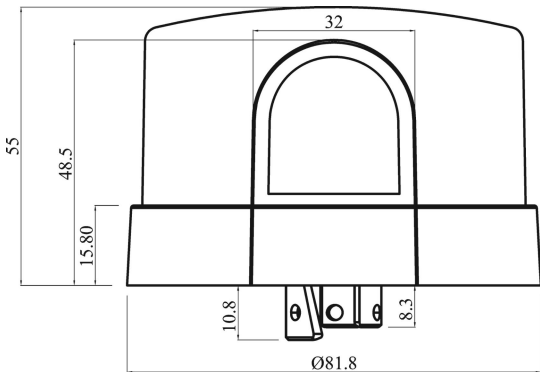

WIRING DIAGRAM

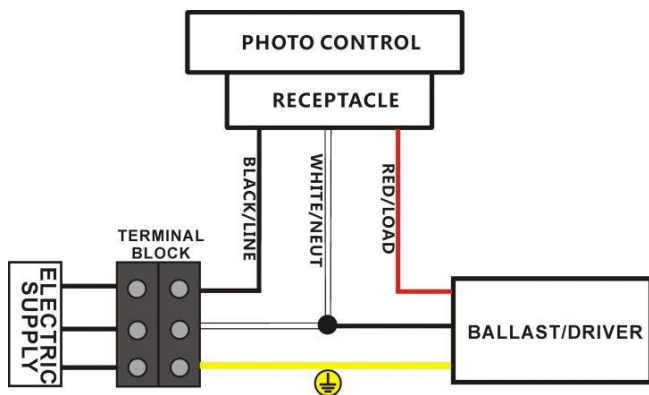

APPLICATIONS

- LED luminaires that require dusk to dawn control.
- Recommended for luminaires that use solid state ballasts/drivers (e.g. CFL, Induction, Electronic HID).
- LED, HID, Induction, Fluorescent or Halogen Systems; Roadways; Street Lighting; Parking Lots; Security Lighting.

TECHNICAL SPECIFICATION

Standard	ANSI C136.10 & UL773
Rated Volts	120V-277V (Applicable: 105-305V)
Frequency	50/60 Hz
Rated Load	1000W/1800VA
LED Rating	2A E-BALLAST
ON/OFF Ratio	1:1.5
Operating Temperature	-40°C to +70°C
Switch	> 5000 ON/OFF Operations at Rated Load
Light Sensor	IR Filter Phototransistor
Power Consumption	≤ 0.5 watts at 120VAC
Cover	Anti-UV Impact Resistance Polypropylene
Base	High Temperature Resistance Polybutylene Terephthalate

NINGBO KLS ELECTRONIC CO; LTD

PRODUCT SELECTION INFORMATION

MODEL	COLOR	Turn-On (fc)	Time Delay	Fail Mode	Surge Protection	IP Grade
LT124L	BU:Blue(Std.) BK:Black GY:Grey GN:Green YL:Yellow	F15: 1.5(≈15Lux)(Std.) F25: 2.5(≈26Lux) F35: 3.5(≈37Lux)	D05: 3-6s(Std.) D10:10-15s D20:20-25s D30:30-35s	NO:Fail Off(Std.) NC:Fail On	M10:320J(Std.) M20:640J M30:960J M40:1280J	66:IP66(Std.) 67:IP67

FREQUENTLY ORDERED PART NUMBER: LT124L-BU-F15-D05-NO-M10-66

FEATURES

- Meets or exceeds ANSI C136.10
- UL94 V-0 Flame Resistance
- ROHS compliant
- Manufactured according to ISO
- IR Filter Phototransistor
- FR4 fiberglass printed circuit board.
- Reliable sealed relay
- MOV rated from 320 Joules
- 6KV Surge Protection
- Insulation Resistance: >500MΩ
- 3-6 second time delay.
- Blue cover standard, other optional
- IP66, optional IP67
- Will Operated down to 90VAC
- 3 Years Warranty

PRODUCT DETAILS:

- 1) Photocontrol: Shall be a Twist Locking Type and meet or exceed all requirements of ANSI C136.10 .
- 2) For standard photocontrols, the cover color will be blue cover or are available as specified by customer.
- 3) Line voltage: 105-305 VAC @ 50/60HZ.
- 4) Load rating: Shall be at least 1800VA. Control must be able to operate incandescent, ballast, LED and lighting contractor type loads.
- 5) Control relay: Shall be sealed.
- 6) Turn ON: Shall be 16±6 Lux LUX. Turn OFF shall be 1.5 times the turn ON level.
- 7) Photo sensor: Sealed silicon sensor. Cadmium sulfide cells are not acceptable.
- 8) Time delay: Control must have instant ON and 3-6 seconds "OFF" delay.
- 9) Housing: Shall be blue of an impact and UV resistant Polypropylene material @ 2.00mm thickness.
- 10) Drop test: Control must withstand a drop of 1 m to a concrete floor without causing damage to the housing or changing electrical operation.
- 11) Markings: The following must appear on the control: month/year of manufacture, individual serial numbers, model description, operating voltage range and load rating.
- 12) Power consumption: Shall consume 0.5 watts or less at 120VAC.
- 13) Environmental: Shall be RoHS compliant. It shall not contain lead, cadmium, mercury or hexavalent chromium. Pigments in plastic parts shall not contain bromine compounds or heavy metal pigments.
- 14) Warranty: 3 years (one for one replacement, labor not included).