
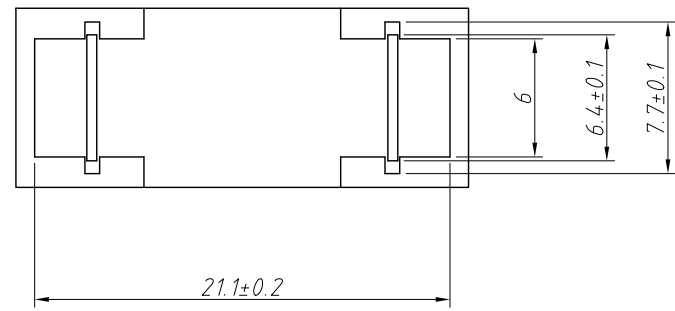
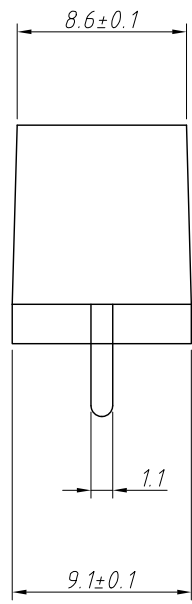


REV	SYM	Revision Record	Appr.	Date
V0	KLS05004	New Version Release	WuHao	2024-11-22

Material and other:  
 Insulator:Flame-Retarded Plastic  
 Contact:Brass,Tin Plated  
 Rated voltage:250V.AC  
 Rated current:6.3A  
 Contact Resistance:5mΩ MAX  
 Insulation Resistance:500MΩ Min  
 Withstanding Voltage:AC 1000V (50HZ) 1 minute

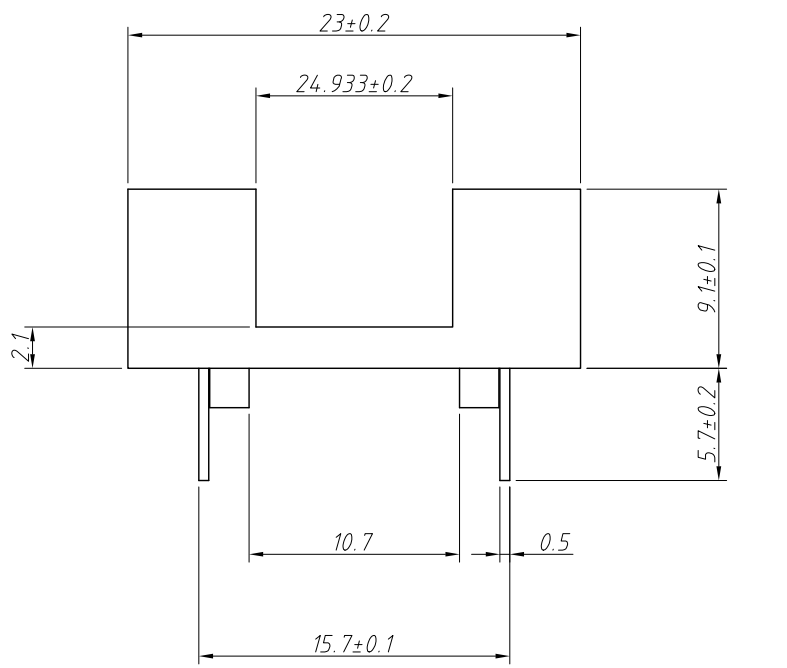

ANGLE TOLERANCE	PROJECTION	Description:	PCB Fuse Holder	
±3°				
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	KLS5-1098
.x ±0.30	SHEET SIZE	A4		
.xx ±0.20	Draw:	WuHao	2024-11-22	NingBo KLS ELECTRONIC CO.,L TD.
.xxx ±0.10	Check:	Daniel	2024-11-22	