

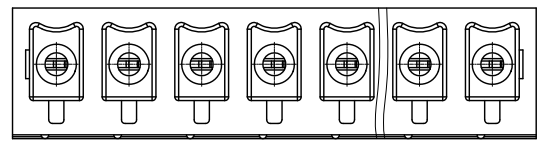
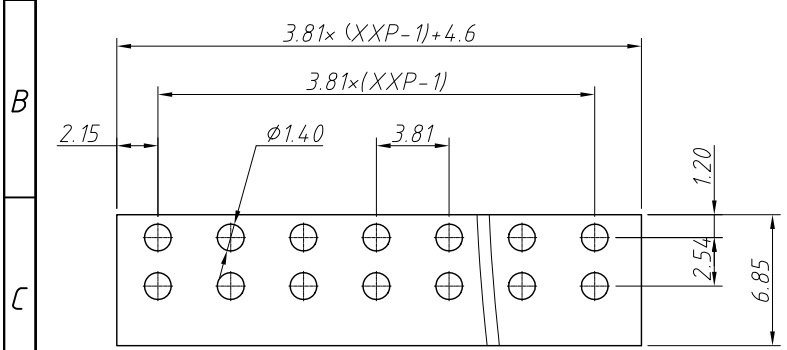


1
RoHS Compliance

6		7		8	
REV	SYM	Revision Record	Appr.	Date	
V0	KLS02006	New Version Release	WuHao	2024-11-01	

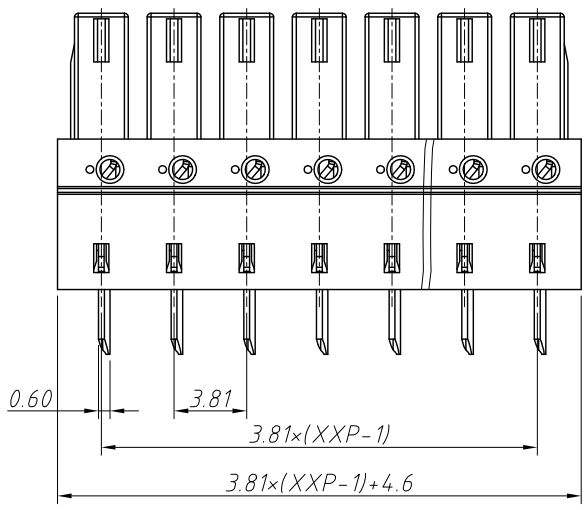

Recommended PCB Layout

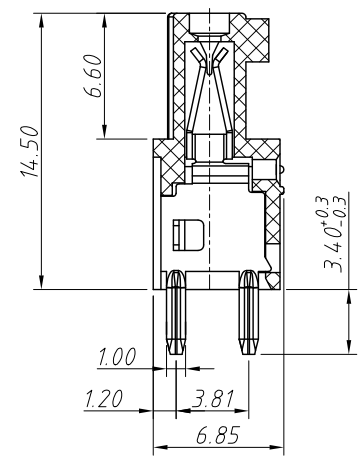


Electrical Characteristics		UL	IEC
Rated Voltage		300V	250V
Rated Current		8A	10A
Withstand Voltage		AC 2000V/1 min	---


Material and other:
 Housing:PA66, UL 94V-0
 Pin Header:Phosphor Bronze, Tin Plated
 Temp. Range:-40°C ~ +105°C
 Soldering:+250°C For 5 Sec

Order Information

L-KLS2-EDKH-3.81-XXP-X

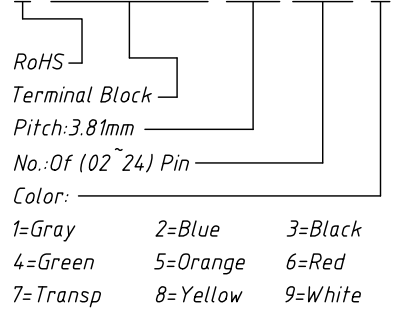

- Color: 1=Gray 2=Blue 3=Black
 4=Green 5=Orange 6=Red
 7=Transp 8=Yellow 9=White



ANGLE TOLERANCE	PROJECTION	Description:			
±3°		Pitch 3.81mm Terminal Block			
GENERAL TOLERANCE	UNITS	mm	KLS P/N:		
0~30 ±0.50	SHEET SIZE	A4	L-KLS2-EDKH-3.81-XXP-X		
30~60 ±0.75	Draw:	WuHao	2024-11-01		
60~90 ±1.00	Check:	Daniel	2024-11-01		