

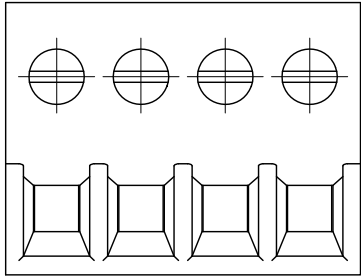
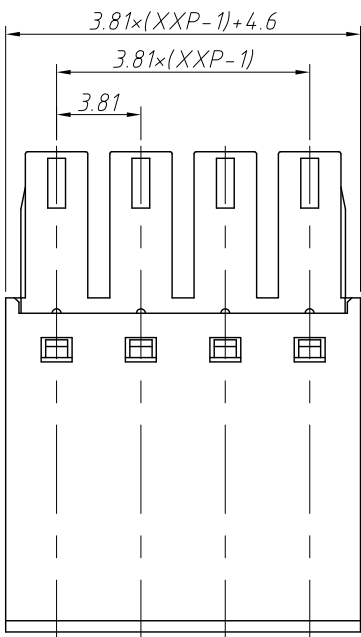


1  
RoHS Compliance

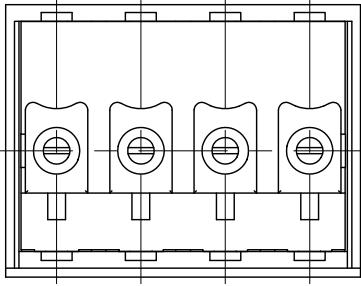

Material and other:  
 Housing:PA66, UL 94V-0  
 Clamp:Phosphor Bronze,Ni Plated  
 Cage:Brass,Zn Plated  
 Screw/Torque:Steel,M2,Zn Plated/0.2N.m  
 Slide Block:Steel,Zn Plated  
 Contact resistance:20mΩ MAX  
 Insulation resistance:500MΩ/DC500V  
 Stripping Length:7mm  
 Temp.Range:-40°C ~ +105°C


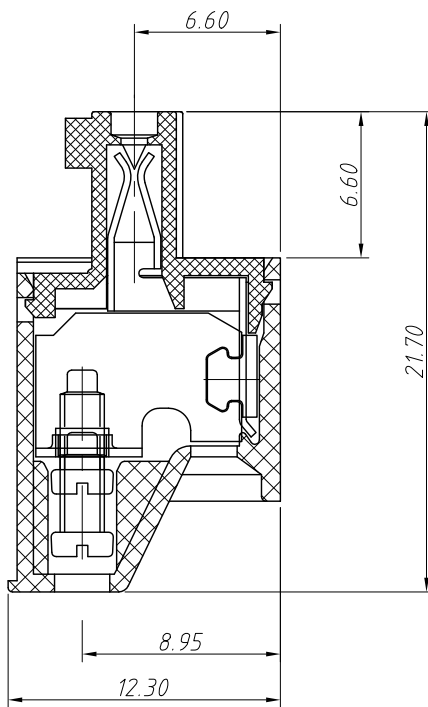


6	7	8
REV	SYM	Revision Record
V0	KLS02006	New Version Release
		Appr.
		WuHao
		Date
		2024-10-31

Electrical Characteristics	UL	IEC
Rated Voltage	300V	250V
Rated Current	8A	13.5A
Withstand Voltage	AC2000V/1 min	---
Wire Range	28~16 AWG	1.0mm <sup>2</sup>

Order Information

L-KLS2-EDKC-3.81-XXP-XX

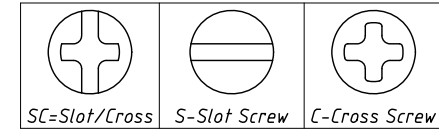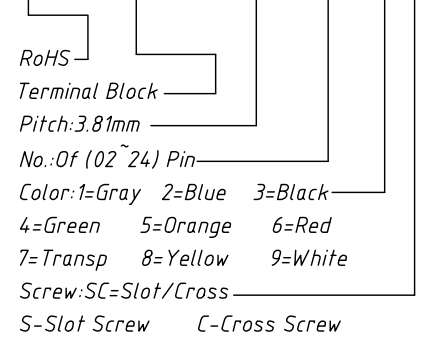

ANGLE TOLERANCE	PROJECTION	Description:
±3°		Pitch 3.81mm Terminal Block
GENERAL TOLERANCE	UNITS	mm
0~30 ±0.50	SHEET SIZE	A4
30~60 ±0.75	Draw:	WuHao 2024-10-31
60~90 ±1.00	Check:	Daniel 2024-10-31
		KLS electronics
		NingBo KLS ELECTRONIC CO.,L TD.