




1 RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS02006	New Version Release	WuHao	2024-11-07

Electrical Characteristics	UL	IEC
Rated Voltage	300V	250V
Rated Current	8A	8A
Withstand Voltage	AC2000V/1 min	---
Wire Range	24 ~ 16 AWG	1.0 mm ²

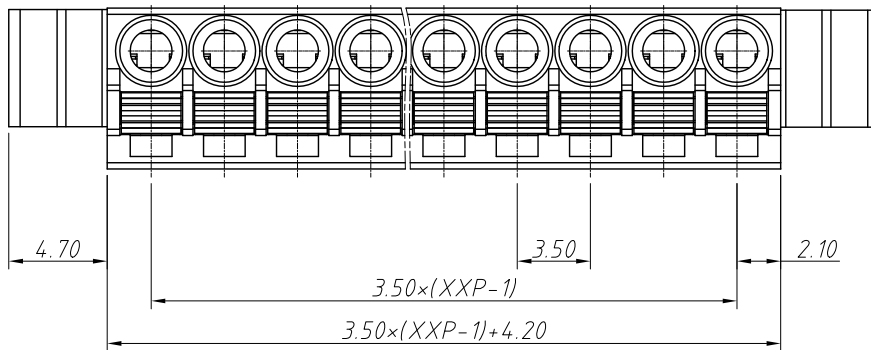

Material and other:
 Housing: PA66, UL 94V-0
 Pin Header: Copper Alloy, Ni Plated
 Shrapnel: Stainless Steel
 Contact resistance: 20mΩ MAX
 Insulation resistance: 500MΩ/DC500V
 Temp. Range: -40°C ~ +105°C
 Strip Length: 9 ~ 10mm

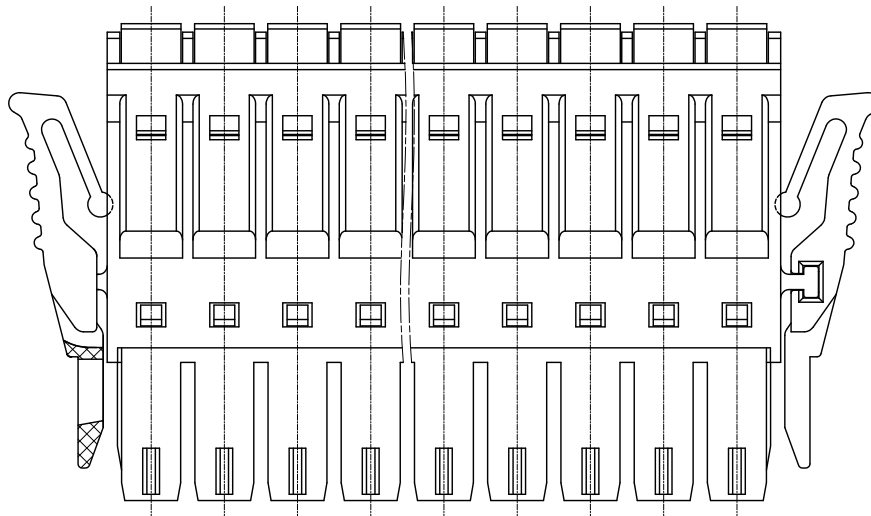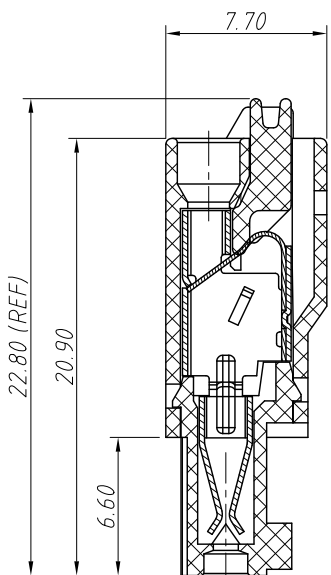

Order Information
 L-KLS2-FMD-3.50-XXP-X

RoHS
 Terminal Block
 Pitch: 3.50mm
 No.: Of (02 ~ 24) Pin
 Color:

1=Gray 2=Blue 3=Black
 4=Green 5=Orange 6=Red
 7=Transp 8=Yellow 9=White

ANGLE TOLERANCE	PROJECTION	Description:
±3°		Pitch 3.50mm Terminal Block
GENERAL TOLERANCE	UNITS	mm
0 ~ 30	±0.50	SHEET SIZE
30 ~ 60	±0.75	Draw:
60 ~ 90	±1.00	Check:
		KLS P/N:
		L-KLS2-FMD-3.50-XXP-X
		WuHao 2024-11-07
		Daniel 2024-11-07

