
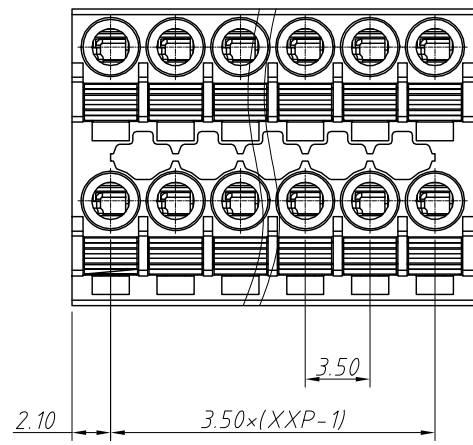




1  
RoHS Compliance

6		7		8	
REV	SYM	Revision Record		Appr.	Date
V0	KLS02006	New Version Release		WuHao	2024-11-07

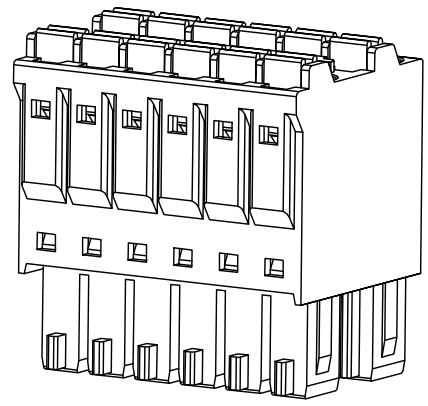

Electrical Characteristics	UL	IEC
Rated Voltage	300V	160V
Rated Current	8A	8A
Withstand Voltage	1600V/1 min	2.5 KV
Wire Range	24 ~ 16 AWG	0.2 ~ 1.5 mm <sup>2</sup>

Material and other:  
 Housing: PA66, UL 94V-0  
 Pin Header: Copper Alloy, Sn Plated  
 Operating Temperature: -40°C ~ +105°C  
 Stripping Length: 9 ~ 10 mm

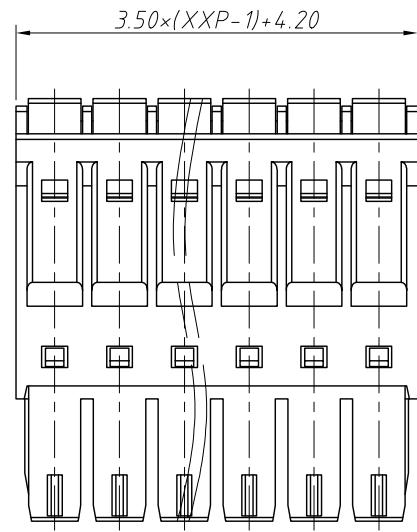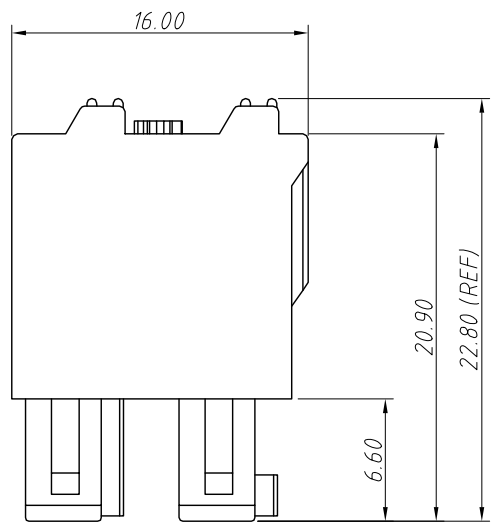

Order Information  
 L-KLS2-FMCCY-3.50-XXP-4 09

RoHS  
 Terminal Block  
 Pitch: 3.50mm  
 No.: Of (04 ~ 48) Pin  
 Color:

1=Gray    2=Blue    3=Black  
 4=Green    5=Orange    6=Red  
 7=Transp    8=Yellow    9=White  
 Product Code: 00 ~ 99

ANGLE TOLERANCE	PROJECTION		Description:		
±3°			Pitch 3.50mm Terminal Block		
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS2-FMCCY-3.50-XXP-409	
0 ~ 30	±0.50	SHEET SIZE	A4		
30 ~ 60	±0.75	Draw:	WuHao	2024-11-07	
60 ~ 90	±1.00	Check:	Daniel	2024-11-07	

NingBo KLS ELECTRONIC CO.,L TD.