

1  
RoHS Compliance




2		3		4		5		6		7		8	
REV	SYM	Revision Record				Appr.	Date						
V0	KLS02006	New Version Release				WuHao	2024-11-07						

Electrical Characteristics	UL	IEC
Rated Voltage	300V	250V
Rated Current	8A	8A
Withstand Voltage	AC2000V/1 min	---
Wire Range	24 ~ 16 AWG	1.0 mm <sup>2</sup>

Material and other:  
 Housing:PA66, UL 94 V-0  
 Clamp:Copper Alloy,Ni Plated  
 Shrapnel:Stainless Steel  
 Fix Screw:Steel Zn Plated  
 Screw:Steel,M3.0,Zn Plated  
 Contact resistance:20mΩ MAX  
 Insulation resistance:500MΩ/DC500V  
 Temp.Range:-40°C ~ +105°C  
 Strip Length:9 ~ 10mm

Order Information  
 L-KLS2-FME-3.50-XXP-X

RoHS  
 Terminal Block  
 Pitch:3.50mm  
 No.:Of (02 ~ 24) Pin  
 Color:  
 1=Gray    2=Blue    3=Black  
 4=Green    5=Orange    6=Red  
 7=Transp    8=Yellow    9=White

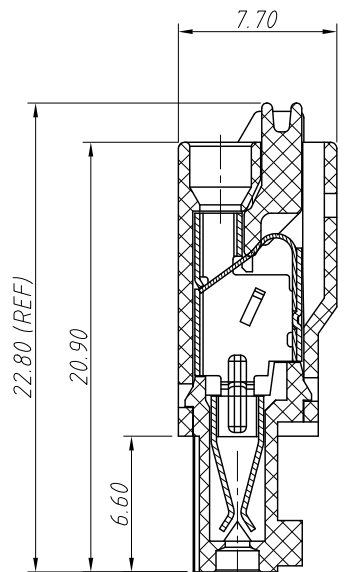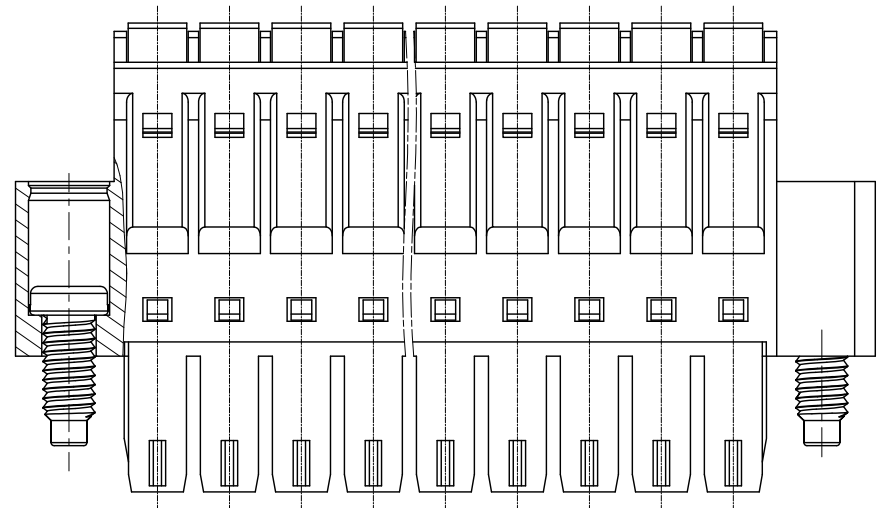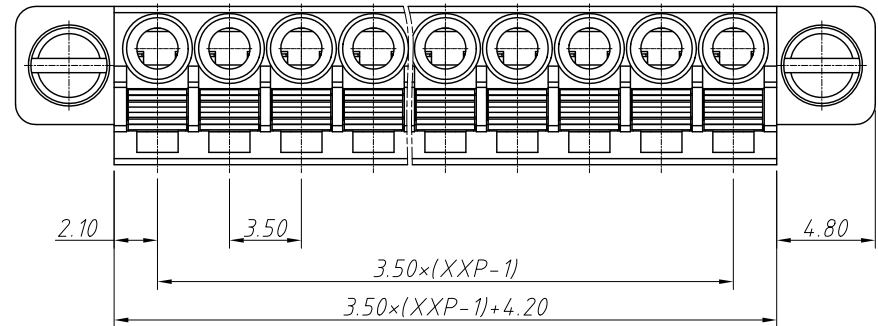

ANGLE TOLERANCE	PROJECTION		Description:	
±3°			Pitch 3.50mm Terminal Block	
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS2-FME-3.50-XXP-X
0 ~ 30	±0.50	SHEET SIZE	A4	
30 ~ 60	±0.75	Draw:	WuHao	2024-11-07
60 ~ 90	±1.00	Check:	Daniel	2024-11-07

