




1
RoHS Compliance

6	7	8
REV	SYM	Revision Record
V0	KLS02006	New Version Release
		Appr. Song
		Date 2024-08-20

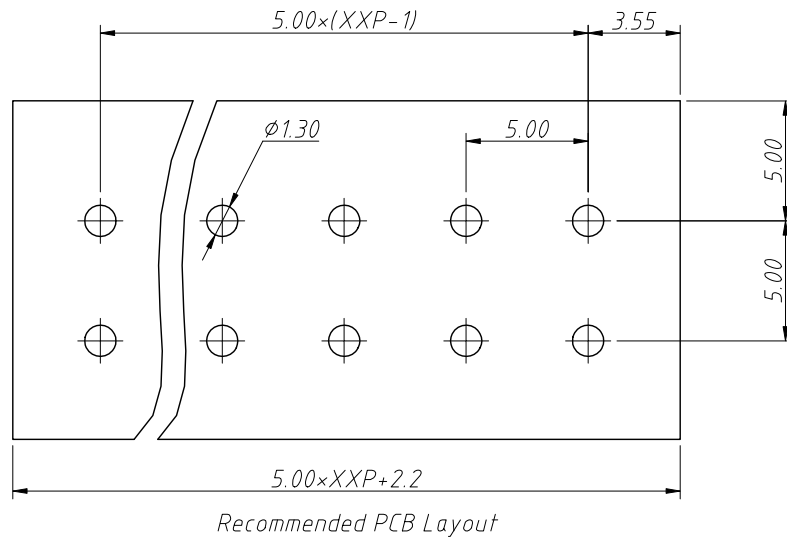

Electrical Characteristics	UL	IEC
Rated Voltage	300V	450V
Rated Current	10A	15A
Withstand Voltage	AC2000V/1min	---
Wire Range	26~14 AWG	1.5mm ²

Material and other:
 Housing: PA66, UL94V-0
 Pin Header: Brass, Tin Plated
 Wire Guard: Stainless Steel
 Contact Resistance: 20mΩ
 Insulation Resistance: 500MΩ/DC500V
 Stripping Length: 5~6mm
 Temp. Range: -40°C ~ +105°C
 MAX Soldering: 250°C±5°C for 5S

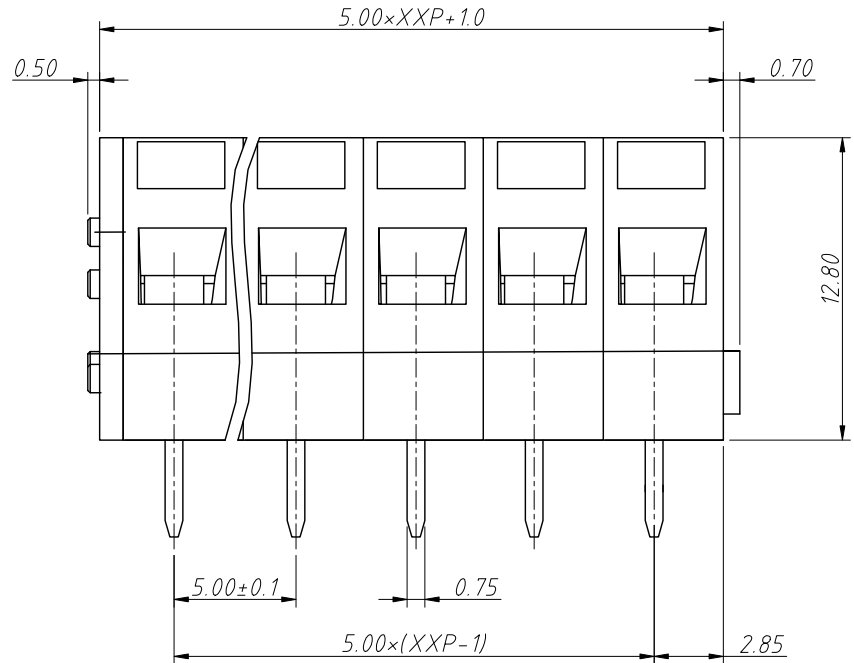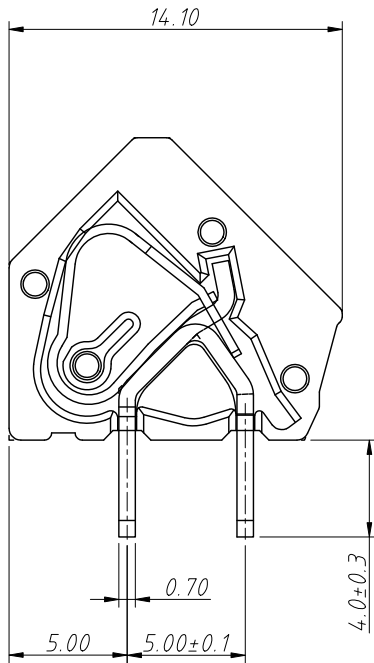

Order Information
 L-KLS2-206-5.00-XXP-X
 L: RoHS
 K: Terminal Block
 2: Pitch: 5.00mm
 5: No. of Pins (1~24P)
 6: Color: 1=Gray 2=Blue 3=Black
 7: 4=Green 5=Orange 6=Red
 8: 7=Transp 8=Yellow 9=White

ANGLE TOLERANCE	PROJECTION	Description:
±3°		5.00mm Spring Terminal Blocks
GENERAL TOLERANCE	UNITS	mm
0~30 ±0.50	SHEET SIZE	A4
30~60 ±0.75	Draw:	Song
60~90 ±1.00	Check:	Daniel
KLS P/N:		L-KLS2-206-5.00-XXP-X
KLS ELECTRONIC		NingBo KLS ELECTRONIC CO.,L TD.